



V2V EDTECH LLP

Online Coaching at an Affordable Price.

OUR SERVICES:

- Diploma in All Branches, All Subjects
- Degree in All Branches, All Subjects
- BSCIT / CS
- Professional Courses



+91 93260 50669



v2vedtech.com



V2V EdTech LLP



v2vedtech



MODEL ANSWER
WINTER- 18 EXAMINATION




Subject Title: Principles of Electronic Communication **Subject Code:** 22334


Important Instructions to examiners:

- 1) The answers should be examined by key words and not as word-to-word as given in the model answer scheme.
- 2) The model answer and the answer written by candidate may vary but the examiner may try to assess the understanding level of the candidate.
- 3) The language errors such as grammatical, spelling errors should not be given more Importance (Not applicable for subject English and Communication Skills).
- 4) While assessing figures, examiner may give credit for principal components indicated in the figure. The figures drawn by candidate and model answer may vary. The examiner may give credit for any equivalent figure drawn.
- 5) Credits may be given step wise for numerical problems. In some cases, the assumed constant values may vary and there may be some difference in the candidate's answers and model answer.
- 6) In case of some questions credit may be given by judgement on part of examiner of relevant answer based on candidate's understanding.
- 7) For programming language papers, credit may be given to any other program based on equivalent concept.


Q. No.	Sub Q.N.	Answer	Marking Scheme
Q.1		Attempt any Five :	10-Total Marks
	a)	Define the term electrical noise. List types of noises.	2M
	Ans:	<p>Electrical Noise:-</p> <p>It can be defined as undesirable electrical signals, which distort or interfere with an original (or desired) signal.</p> <p>Types of noises:-</p> <pre> graph TD Noise --> External Noise --> Internal External --> Atmospheric External --> Man-made External --> Extraterrestrial Internal --> Shot_noise[Shot noise] Internal --> Thermal_noise[Thermal noise] Internal --> Transit_time_noise[Transit time noise] Internal --> Flicker_noise[Flicker noise] Internal --> Partition_noise[Partition noise] </pre>	1M for definition and 1M for types
	b)	State formula to calculate bandwidth of AM signal.	2M
	Ans:	<p>Bandwidth of AM signal = $2 * F_m$</p> <p>Where</p>	Correct formula -2M

	Fm is the modulating signal frequency	
c)	State the need of modulation in communication system.	2M
Ans:	Need of modulation:- <ol style="list-style-type: none"> 1. To reduce the height of antenna 2. To avoids mixing of signals 3. To increases the range of communication 4. To make multiplexing of maximum signal is possible 5. To improve the quality of reception 	Any 4 points ½ M each
d)	List different methods of demodulation of FM signal.	2M
Ans:	<ul style="list-style-type: none"> • Balanced Slope detection • Ratio detector • Foster Seeley discriminator • Phase locked loop demodulator 	½ M each
e)	Sketch the graph of pre-emphasis and de-emphasis.	2M
Ans:		2M
f)	Sketch neat diagram of duct propagation.	2M
Ans:		2M
g)	Draw sketch of half wave dipole antenna and its radiation pattern.	2M

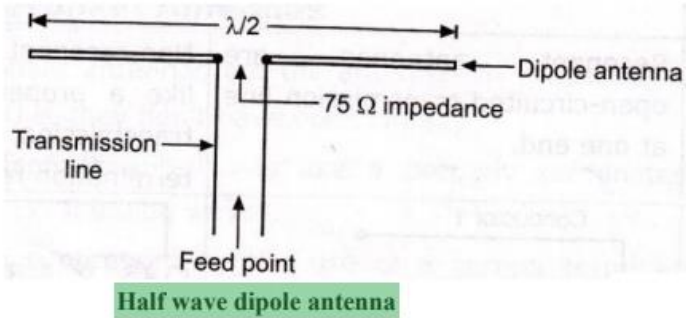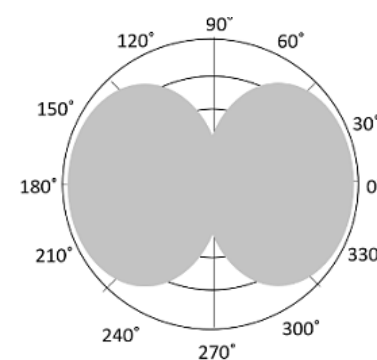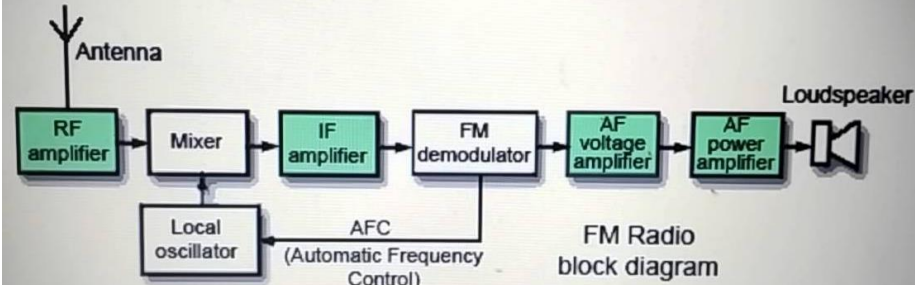	<p>Diagram:-</p>  <p>Ans: Radiation pattern:-</p> 	<p align="center">1M each</p>
<p>Q 2</p>	<p>Attempt any Three :</p>	<p align="center">12-Total Marks</p>
<p>a)</p>	<p>State the frequency range for the following :</p> <ol style="list-style-type: none"> Voice frequency High frequency IR frequency Visible frequency. 	<p align="center">4M</p>
<p>Ans:</p>	<ul style="list-style-type: none"> Voice frequency:- 300 Hz to 3400 Hz High frequency:- 3MHz to 30 MHz IR frequency:- 300 GHz -430THz- Visible frequency:- 430 THz -790 THz 	<p align="center">1M each</p>
<p>b)</p>	<p>Draw neat block diagram of FM receiver and explain function of each block</p>	<p align="center">4M</p>
<p>Ans:</p>	 <p align="center">OR</p>	<p align="center">Diagram 2M</p>

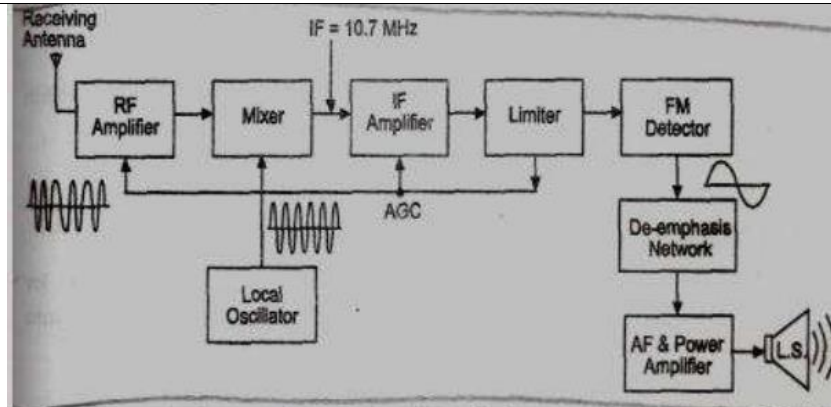

OR

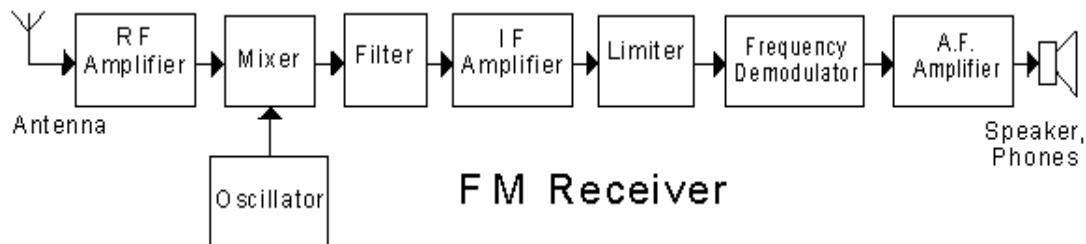

FM Receiver

Explanation:-

RF amplifier:

There are two important functions of RF amplifier:

- 1) To increase the strength of weak RF signal.
- 2) To reject image frequency signal. In FM broadcast the channel bandwidth is large as compared to AM broadcast.

Hence the RF amplifier must be design to handle large bandwidth.

Frequency Mixer:

The function of frequency mixer is to heterodyne signal frequency f_s and local oscillator frequency f_o . At the output, it produces the difference frequency known as intermediate frequency f_i . The intermediate frequency used in FM receiver is higher than that in AM receiver. Its value is 12MHz (practical value of IF is 10.7MHz).

Local oscillator:

Since FM broadcast operates in VHF and UHF band, a separate local oscillator is used in FM receiver The local oscillator frequency f_o is kept smaller than the signal frequency f_s by an amount equal to the intermediate frequency f_i ($f_i = f_s - f_o$).

IF amplifier:

Two or more stages of IF amplifier are used to provide large gain to the receiver. This increases the sensitivity of a receiver. If amplifier should be designed to handle large bandwidth.

Amplitude limiter:

The function of amplitude limiter is to remove all amplitude variation of FM carrier voltage that may occur due to atmospheric disturbances. Use of amplitude limiter makes the system less noisy.

FM Discriminator or detector:



Function of each block - 2M



	<p>It separates modulating signal from frequency modulated carrier signal. Thus it produces audio signal at its output.</p> <p>Audio frequency voltage and power amplifier: Audio amplifier increases voltage and power level of audio signal to a suitable level. In FM broadcast, the maximum modulating frequency is 15 kHz. Hence the audio amplifier must have large bandwidth.</p>																
c)	<p>Compare AM with FM with respect to following points:</p> <p>a) Definition. b) Modulation index. c) Bandwidth. d) Side band.</p>	4M															
Ans:	<table border="1"> <thead> <tr> <th>Parameters</th> <th>AM</th> <th>FM</th> </tr> </thead> <tbody> <tr> <td>Definition</td> <td>It is the process in which the amplitude of carrier signal is varied in accordance with the instantaneous value of modulating signal keeping frequency and phase constant.</td> <td>It is the process in which the frequency of carrier signal is varied in accordance with the instantaneous value of modulating signal keeping amplitude and phase constant.</td> </tr> <tr> <td>Modulation index</td> <td>The value of modulation index is less than or equal to 1</td> <td>The value of modulation index is always greater than 1</td> </tr> <tr> <td>Bandwidth</td> <td>Twice the highest modulating frequency.</td> <td>Twice the sum of the modulating signal frequency and the frequency deviation.</td> </tr> <tr> <td>Side band</td> <td>There are two sidebands</td> <td>Infinite number of sideband</td> </tr> </tbody> </table>	Parameters	AM	FM	Definition	It is the process in which the amplitude of carrier signal is varied in accordance with the instantaneous value of modulating signal keeping frequency and phase constant.	It is the process in which the frequency of carrier signal is varied in accordance with the instantaneous value of modulating signal keeping amplitude and phase constant.	Modulation index	The value of modulation index is less than or equal to 1	The value of modulation index is always greater than 1	Bandwidth	Twice the highest modulating frequency.	Twice the sum of the modulating signal frequency and the frequency deviation.	Side band	There are two sidebands	Infinite number of sideband	1M each
Parameters	AM	FM															
Definition	It is the process in which the amplitude of carrier signal is varied in accordance with the instantaneous value of modulating signal keeping frequency and phase constant.	It is the process in which the frequency of carrier signal is varied in accordance with the instantaneous value of modulating signal keeping amplitude and phase constant.															
Modulation index	The value of modulation index is less than or equal to 1	The value of modulation index is always greater than 1															
Bandwidth	Twice the highest modulating frequency.	Twice the sum of the modulating signal frequency and the frequency deviation.															
Side band	There are two sidebands	Infinite number of sideband															
d)	<p>A super heterodyne radio receiver with an IF of 455kHz is tuned to 1000kHz .Find:</p> <p>a) Image frequency. b) Local oscillator frequency.</p>	4M															
Ans:	<p>Tuned frequency is 1000 KHz means it is RF frequency IF frequency is 455 KHz</p> <p>i) Image frequency = RF frequency \pm 2 * IF frequency</p> $= 1000 * 10^3 \pm 2 * 455 * 10^3$ $= 1910 \text{ KHz (sum frequency)}$ <p>OR = 90KHz (difference frequency) this frequency is not possible Hence the image frequency is 1910KHz</p> <p>ii) Local oscillator frequency = RF frequency - IF frequency</p>	<p>Formula of each -1M</p> <p>Correct answer-1M each</p>															



= 1000 KHz – 455 KHz
= 545 KHz

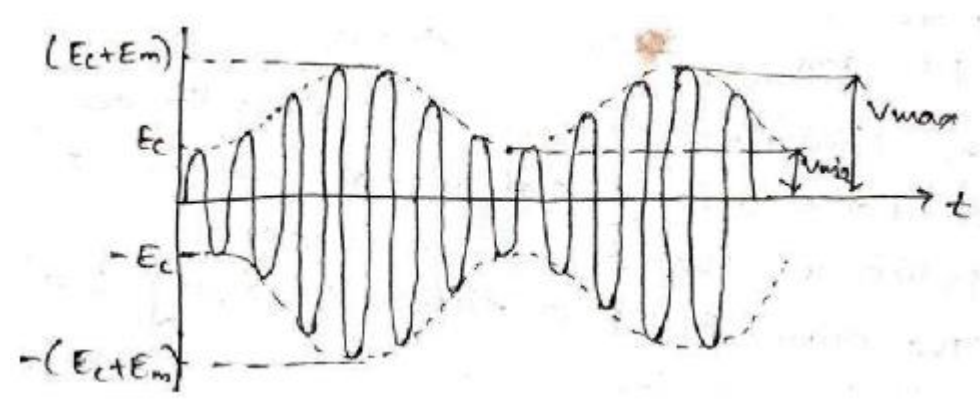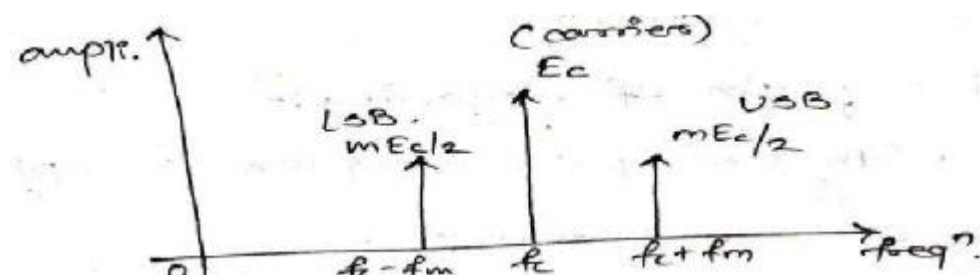
Q.3	Attempt any three:	16-Total Marks
a)	<p>Draw AM signal in</p> <ol style="list-style-type: none"> Time domain Frequency domain. 	4M
Ans:	<p>(i) AM in Time domain</p>  <p>(ii) AM in frequency domain</p> 	<p>2 marks</p> <p>2 Marks</p>
b)	<p>Find out type of propagation for following applications:</p> <ol style="list-style-type: none"> AM radio broadcasting Ship to shore propagation. Microwave links. Satellite communication. 	4M
Ans:	<ol style="list-style-type: none"> AM radio broadcasting:-Ground Wave Propagation Ship to shore propagation:- Ground Wave Propagation Micro wave links:-Space Wave Propagation/ line of sight Satellite communication:-Space Wave Propagation/ line of sight 	1 mark for each type

c)	Compare characteristics of asynchronous and synchronous transmission mode (four points).	4M												
Ans:	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">Synchronous transmission</th> <th style="width: 50%;">Asynchronous transmission</th> </tr> </thead> <tbody> <tr> <td>1. Synchronous transmission are synchronized by an external clock.</td> <td>1. Asynchronous transmission are synchronized by special signals along the transmission media.</td> </tr> <tr> <td>2. In synchronous transmission data flows in a full duplex mode in the form of blocks or frames.</td> <td>2. In asynchronous transmission data flows in a half duplex mode, 1 byte or a character at a time.</td> </tr> <tr> <td>3. In synchronous transmission ,data transmission speed is fast.</td> <td>3. In asynchronous transmission, data transmission speed is slow.</td> </tr> <tr> <td>4. Synchronous transmission is cost expensive.</td> <td>4. Asynchronous transmission is economical.</td> </tr> <tr> <td>5. Synchronous transmission is used for transferring the bulk of data as it is efficient.</td> <td>5. Asynchronous transmission is used for transferring a small amount of data as it is simple and economical.</td> </tr> </tbody> </table>	Synchronous transmission	Asynchronous transmission	1. Synchronous transmission are synchronized by an external clock.	1. Asynchronous transmission are synchronized by special signals along the transmission media.	2. In synchronous transmission data flows in a full duplex mode in the form of blocks or frames.	2. In asynchronous transmission data flows in a half duplex mode, 1 byte or a character at a time.	3. In synchronous transmission ,data transmission speed is fast.	3. In asynchronous transmission, data transmission speed is slow.	4. Synchronous transmission is cost expensive.	4. Asynchronous transmission is economical.	5. Synchronous transmission is used for transferring the bulk of data as it is efficient.	5. Asynchronous transmission is used for transferring a small amount of data as it is simple and economical.	1 mark for each point
Synchronous transmission	Asynchronous transmission													
1. Synchronous transmission are synchronized by an external clock.	1. Asynchronous transmission are synchronized by special signals along the transmission media.													
2. In synchronous transmission data flows in a full duplex mode in the form of blocks or frames.	2. In asynchronous transmission data flows in a half duplex mode, 1 byte or a character at a time.													
3. In synchronous transmission ,data transmission speed is fast.	3. In asynchronous transmission, data transmission speed is slow.													
4. Synchronous transmission is cost expensive.	4. Asynchronous transmission is economical.													
5. Synchronous transmission is used for transferring the bulk of data as it is efficient.	5. Asynchronous transmission is used for transferring a small amount of data as it is simple and economical.													
d)	Explain simple AGC and delayed AGC with the help of neat graph.	4M												
Ans:	<p>The graph plots Output Signal Level on the y-axis and Input Carrier Level on the x-axis. The origin is marked 'O'. A point 'A' is marked on the x-axis. Four curves originate from the origin: 1. 'No AGC' is a straight line with a constant slope. 2. 'Simple AGC' is a curve that starts with a slope and then levels off to a constant horizontal line. 3. 'Delayed AGC' is a curve that remains linear until it reaches point A on the x-axis, after which it levels off to a constant horizontal line. 4. 'Ideal AGC' is a horizontal line starting from the origin.</p> <p>1) Simple AGC:-</p> <ul style="list-style-type: none"> • Simple AGC is a system by means of which overall gain of a radio receiver is varied, automatically with the changing strength of the receiver signal to keep the output substantially constant. • Hence the receiver gain is automatically reduced as the input signal becomes more & more strong • There is a reduction in gain for weak signals. • It is used in domestic radio receiver. <p>2) Delayed AGC:-</p> <ul style="list-style-type: none"> • As shown in the diagram, AGC biased is not applied until the input signal strength reaches the predetermined level of point A • After this level, the point A AGC bias is applied just like simple AGC but 	2 marks for graph,1 mark for each type explanation												



		<p>more strongly.</p> <ul style="list-style-type: none"> • There is no reduction in gain for weak signals. • The problem of reducing the receiver gain for weak signal is avoided .the delayed AGC is not used in low cost radio receiver. • It is used in high quality receiver like communication receiver. 													
Q.4	A)	Attempt any THREE :	12-Total Marks												
	a)	<p>Define the following terms:</p> <ol style="list-style-type: none"> 1) Virtual height 2) Actual height 3) Critical frequency. 4) Maximum usable frequency. 	4M												
	Ans:	<p>1)Virtual height:-The incident and refracted rays follow paths that are exactly the same as they have been if reflection had taken place from a surface located at a greater height, called Virtual height of this layer</p> <p>2) Actual height:-The actual height of the wave in the ionized layer is a curve and is due to refraction of wave. The height from this curve to earth surface is called actual height.</p> <p>3) Critical frequency: The critical frequency of a layer is defined as the maximum frequency that is returned back to the earth by that layer, when the wave is incident at an angle 90^0 (normal) to it. The critical frequency for F2 layer is between 5 to 12 MHz.</p> <p>4) Maximum usable frequency: The limiting frequency when the angle of incidence is other than the normal is known as maximum unstable frequency. $MUF= f_c \sec\theta$</p>	Each correct definition carries 1 mark												
	b)	Compare narrow band FM with wide band FM (fourpoints).	4M												
	Ans:	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%; text-align: center;">Narrow band FM</th> <th style="width: 50%; text-align: center;">Wide band FM</th> </tr> </thead> <tbody> <tr> <td>1 .Modulation Index is less than or slightly greater than 1.</td> <td>1. Modulation Index is greater than 1.</td> </tr> <tr> <td>2.Maximum deviation is 5 KHz.</td> <td>2. Maximum deviation is 75 KHz.</td> </tr> <tr> <td>3.Range of modulating frequency is 30 Hz to 3KHz</td> <td>3. Range of modulating frequency is 30 Hz to 15KHz</td> </tr> <tr> <td>4. Bandwidth is small approximately same as that of AM.</td> <td>4. Bandwidth is large about 15 times higher than bandwidth of Narrow band FM.</td> </tr> <tr> <td>5.Application:-FM mobile communication like police wireless, ambulance etc.</td> <td>5. Application:-Entertainment broadcasting.</td> </tr> </tbody> </table>	Narrow band FM	Wide band FM	1 .Modulation Index is less than or slightly greater than 1.	1. Modulation Index is greater than 1.	2.Maximum deviation is 5 KHz.	2. Maximum deviation is 75 KHz.	3.Range of modulating frequency is 30 Hz to 3KHz	3. Range of modulating frequency is 30 Hz to 15KHz	4. Bandwidth is small approximately same as that of AM.	4. Bandwidth is large about 15 times higher than bandwidth of Narrow band FM.	5.Application:-FM mobile communication like police wireless, ambulance etc.	5. Application:-Entertainment broadcasting.	1 mark for each correct point
Narrow band FM	Wide band FM														
1 .Modulation Index is less than or slightly greater than 1.	1. Modulation Index is greater than 1.														
2.Maximum deviation is 5 KHz.	2. Maximum deviation is 75 KHz.														
3.Range of modulating frequency is 30 Hz to 3KHz	3. Range of modulating frequency is 30 Hz to 15KHz														
4. Bandwidth is small approximately same as that of AM.	4. Bandwidth is large about 15 times higher than bandwidth of Narrow band FM.														
5.Application:-FM mobile communication like police wireless, ambulance etc.	5. Application:-Entertainment broadcasting.														

c)	<p>Redraw the block diagram by identifying the blank blocks. Explain the role of blocks A and B.</p>	4M
Ans:	<p>Role of block A and B</p> <p>Mixer- Receives signal from RF stage F_s and the local oscillator F_o, and are mixed to produce intermediate frequency signal IF which is given as: $IF = F_o - F_s$.</p> <p>Detector- Amplified signal is detected by the detector to get original modulating signal. The detector also provides control signals to control the gain of IF and RF stage called as AGC.</p>	<p>Labelling blocks A,B – 1 M each</p> <p>Role of A - 1M</p> <p>Role of B - 1M</p>
d)	<p>Justify electromagnetic wave is said to be transverse wave.</p>	4M
Ans:	<p>Transverse electromagnetic wave:-</p>	<p>2 marks- diagram, 2 marks- justification</p>

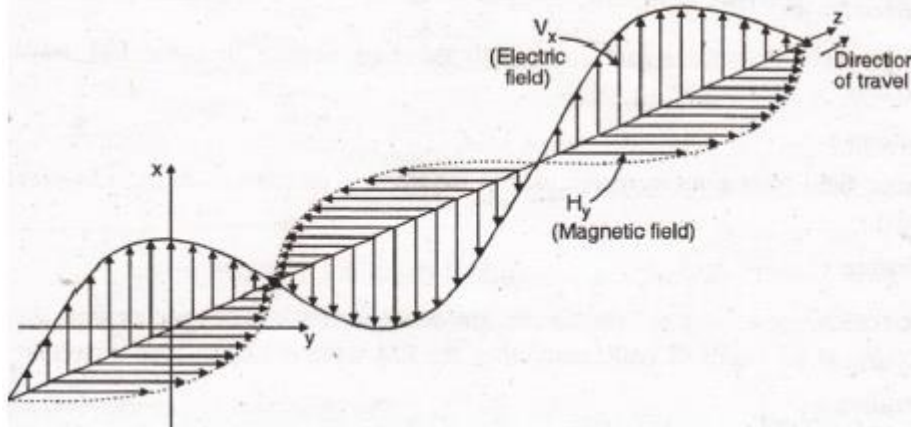


The electromagnetic waves are oscillations which propagate through free space. In electromagnetic waves the direction of electric field, magnetic field & propagation are mutually perpendicular.

Hence electromagnetic waves are called as transverse wave.

The polarization of a plane EM wave is simply the orientation of the electric field vector with respect to the surface (i.e. looking at the horizon)


e) Sketch of Yagi-Uda antenna with its radiation pattern. Explain each element of Yagi-Uda antenna

4M

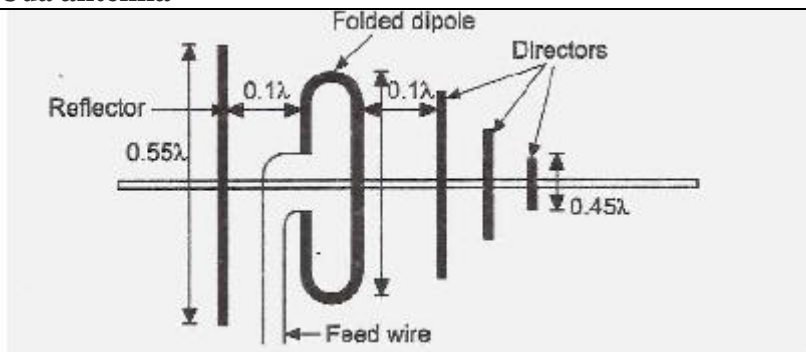


Radiation Pattern:-


Ans:

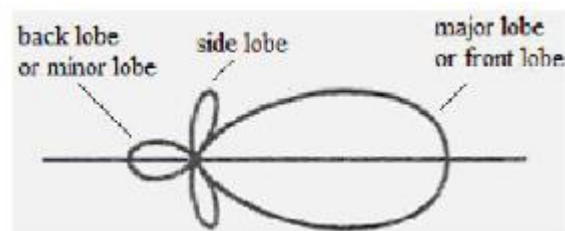

1 mark-
diagram,1
mark-
radiation
pattern,2
marks-
explanation


Explanation- A Yagi-Uda antenna, commonly known as a Yagi antenna, is a directional antenna consisting of multiple parallel elements in a line, usually half-wave dipoles made of metal rods. . Yagi-Uda antennas consist of a single driven element connected to the transmitter or receiver with a transmission line, and additional parasitic elements so called reflector and one or more directors. The reflector is placed at the back of the folded dipole. Reflector reflects the unwanted signals. The director is placed in front of folded dipole which collects the wanted signals.

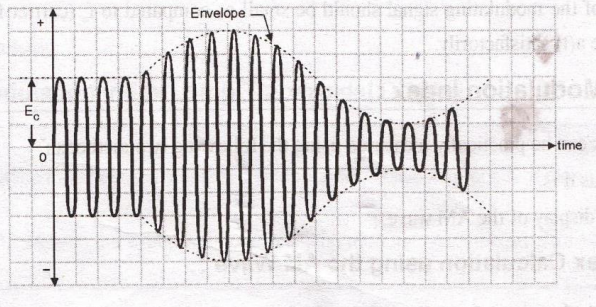		<p>ionization density is maximum at noon and disappears at night.</p> <p>2. E Layer: It is the next layer at a height of 100 kms with thickness 25 km. The layer disappears at night due to recombination of ions and molecules.</p> <p>3. F1 Layer: It is the next layer at a height of 180 kms with thickness 20 km. It provides more absorption for HF waves.</p> <p>4. F2 Layer: It is the next layer at a height of 250-400 kms with thickness 200 km. It is having highest electron density of all layers, due to this F2 layer remains present at night time.</p>	
	<p>b)</p> <p>i) State the significance of modulation index in AM transmission.</p> <p>ii) Explain the effect of modulation index on AM wave with waveforms.</p>		<p>6M</p>
Ans:	<p>Significance of modulation index in AM transmission</p> <ul style="list-style-type: none"> • It is used to determine the strength and quality of transmitted signal. • If the modulation index is small, then the amount of variation in the carrier amplitude is small. Thus, the audio signal transmitted will not be strong. • The greater the degree of modulation, the stronger and clearer will be the audio signal during reception. <p>Effect of modulation index on AM wave</p> <p>i) $m < 1$</p> <ul style="list-style-type: none"> • If $m < 1$ or if the percentage of modulation is less than 100% then this type of modulation is known as under modulation • The amplitude of modulating signal less than carrier amplitude, no distortion will occur. <div style="text-align: center;">  </div> <p>ii) $m = 1$</p> <ul style="list-style-type: none"> • If $m = 1$ or percentage of modulation is 100% this type of modulation is 100% modulation • The ideal condition for AM is $m = 1$, since this will produce the greatest output at the receiver with no distortion. 	<p>Significance 3M & three conditions 1M each</p>	

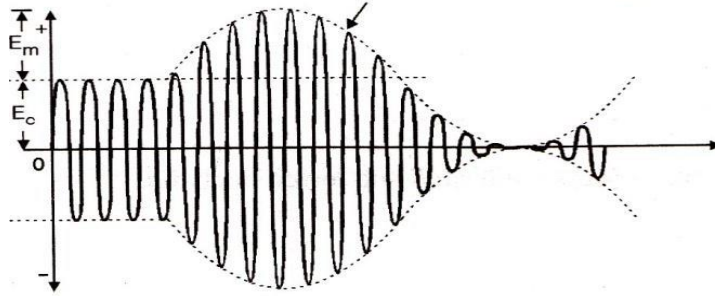

iii) $m > 1$

- If $m > 1$ or if the percentage of modulation is greater than 100% the this type of modulation is known as over modulation the modulating signal being of greater amplitude part of its information is lost in the process of modulation which is undesirable.

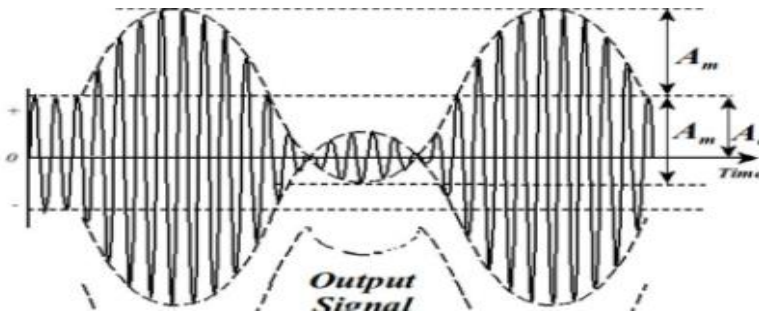

Write the application of the following antennas:

- 1) Rectangular antenna
- 2) Dish antenna
- 3) Horn antenna
- 4) Loop antenna
- 5) Yagi-Uda antenna.

c)

6M

(Note :AnyRelevant application gives the Marks.)

Applications:

1.Rectangular antenna



- Used in Mobile and satellite communication
- Used in Global Positioning System
- Used for Radio Frequency Identification (RFID)
- Radar

Dish Antenna

- Used in microwave relay links that carry telephone and television signals between nearby cities
- Used in wireless WAN/LAN links for data communications, satellite communications and spacecraft communication antennas.
- Used in radio telescopes.

Ans:

6M

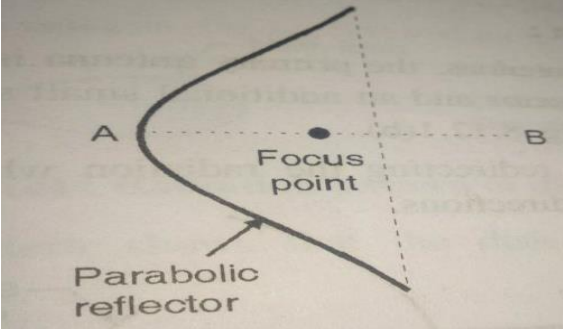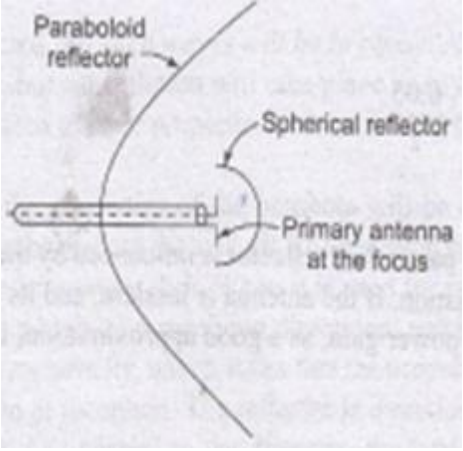	<p>Horn Antenna i) Used at microwave frequency. ii) Used in satellite tracking.</p> <p>Loop Antenna 1. For direction finding 2. In portable receivers 3. In navigation</p> <p>Yagi-Uda antenna 1. Yagi-Uda antenna is used in HF and VHF range as a TV receiving antenna. 2. Yagi-Uda antenna is used in conditional Access System (CAS) at the decryptor.</p>	
Q.6	Attempt any TWO:	12-Total Marks
	<p>a) Describe operating principle of dish antenna. Draw its constructional details and radiation</p>	6M
Ans:	<p>Operating principle: Dish antenna uses simple reflection principle, just as a mirror can reflect light and a curved mirror can reflect and focus light at a single point, the dish reflects and focuses the radio waves. This is the same principle and shape that is used as reflector in a flashlight or headlight behind the bulb. Dish antennas are used for systems that transmit and receive as well as receive only.</p> <p>Dish antenna</p>  <p>Or</p> 	<p>(Operating Principle:2 M, Construction:2M, Radiation pattern:2M)</p>



		$=0.78$ $P_t = P_C (1+m_a^2/2)$ $=10(1+(0.78)^2/2)$ $=13.05 \text{ kW}$	
--	--	---	--



V2V EDTECH LLP

Online Coaching at an Affordable Price.

OUR SERVICES:

- Diploma in All Branches, All Subjects
- Degree in All Branches, All Subjects
- BSCIT / CS
- Professional Courses



+91 93260 50669



v2vedtech.com



V2V EdTech LLP



v2vedtech



SUMMER-19 EXAMINATION

Subject Name: Principles of electronic communication

Model Answer

22334

Important Instructions to examiners:

- 1) The answers should be examined by key words and not as word-to-word as given in the model answer scheme.
- 2) The model answer and the answer written by candidate may vary but the examiner may try to assess the understanding level of the candidate.
- 3) The language errors such as grammatical, spelling errors should not be given more Importance (Not applicable for subject English and Communication Skills).
- 4) While assessing figures, examiner may give credit for principal components indicated in the figure. The figures drawn by candidate and model answer may vary. The examiner may give credit for any equivalent figure drawn.
- 5) Credits may be given step wise for numerical problems. In some cases, the assumed constant values may vary and there may be some difference in the candidate's answers and model answer.
- 6) In case of some questions credit may be given by judgement on part of examiner of relevant answer based on candidate's understanding.
- 7) For programming language papers, credit may be given to any other program based on equivalent concept.

Q. No.	Sub Q. N.	Answers	Marking Scheme
1	(A)	Attempt any FIVE of the following:	10- Total Marks
	(a)	Define simplex and half duplex system with neat sketch	2M
	Ans:	<p>Simplex System: - The system in which the information is communicated only in one direction, called as simplex system e.g. TV broadcasting or radio.</p> <div style="text-align: center;"> <p>Simplex</p> <p>Fig: Simplex System</p> </div> <p>Half Duplex System: The system which is bidirectional that is they can transmit as well receive information but one at a time is known as half duplex.</p>	1M per system(1/2 mark definition & 1/2 mark sketch)

SUMMER-19 EXAMINATION

Subject Name: Principles of electronic communication

Model Answer

22334

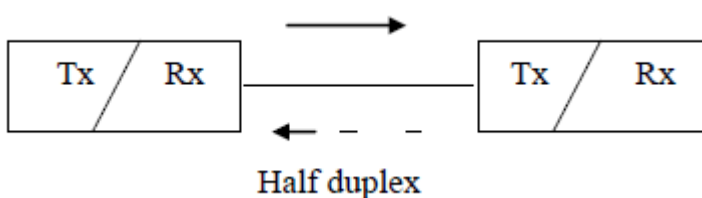


Fig: Half Duplex System

(b) Define term signal to noise ratio.

2M

Ans: **Signal to Noise ratio:** The ratio of the strength of an electrical or other signal carrying information to that of unwanted interference is called as signal to noise ratio.

OR

Signal to Noise Ratio is defined as the ratio of signal power to the noise power at the same point.

$$S/N = P_s / P_n$$

where, P_s = Signal Power

P_n = Noise Power at the same point

2 M for
correct
definition

(c) Represent FM wave in time domain and frequency domain

2M

Ans:

a) FM in time domain spectrum

1M for
each
domain


SUMMER-19 EXAMINATION

Subject Name: Principles of electronic communication


Model Answer

22334


Carrier

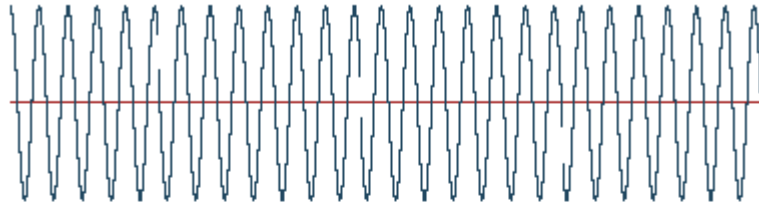


Modulating Wave

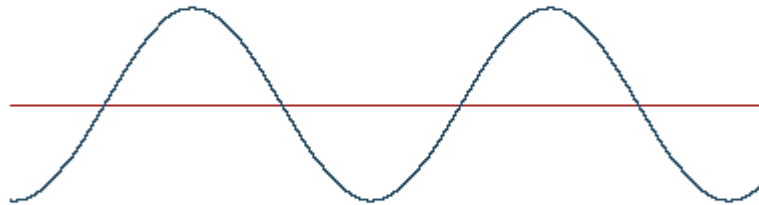

Modulated Result

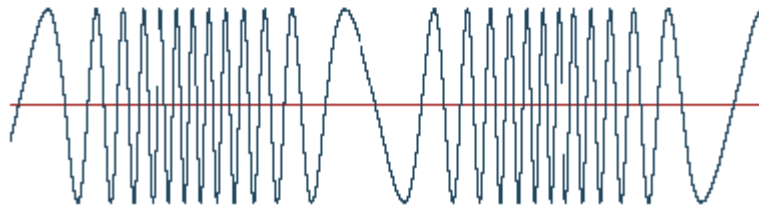

b) FM in frequency domain spectrum

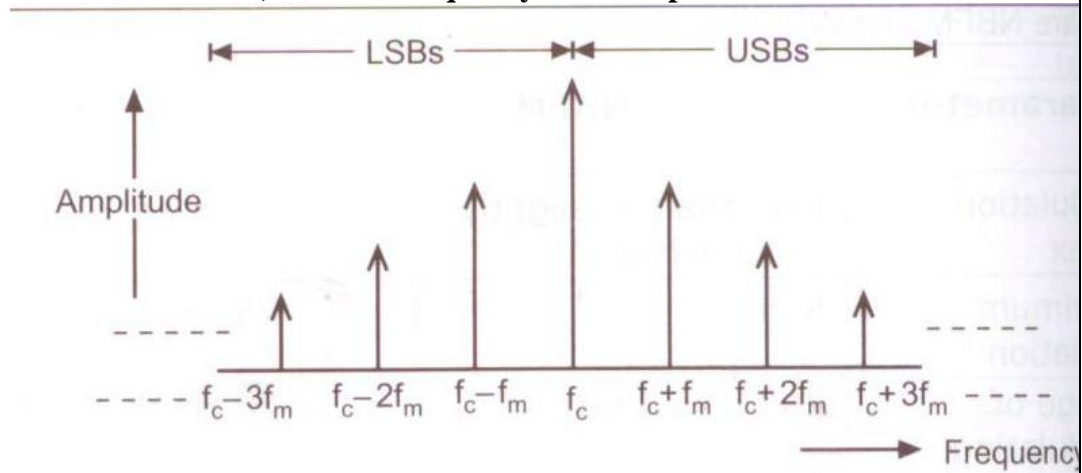

(d) State the types of AM w.r.t. frequency spectrum

2M

Ans: Types of AM based on frequency spectrum:
1) Double side-band Full Carrier System (DSB-FC)
2) Double side-band Suppressed Carrier System (DSB-SC)

1/2 mark
for any 4
types

SUMMER-19 EXAMINATION

Subject Name: Principles of electronic communication

Model Answer

22334

- 3) Single Sideband Suppressed Carrier System (SSB-SC)
- 4) Independent Sideband System (ISB)
- 5) Vestigial Sideband System (VSB)

e) Draw pre emphasis and de emphasis circuit used in FM transmission and reception

2M

Ans:

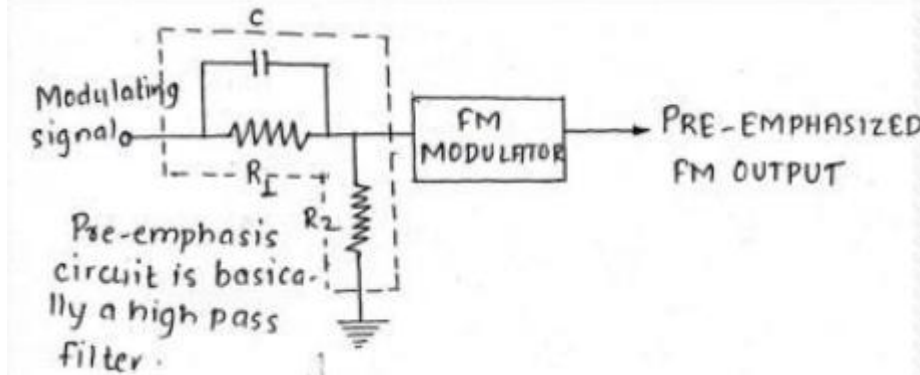


Fig-Pre emphasis Circuit

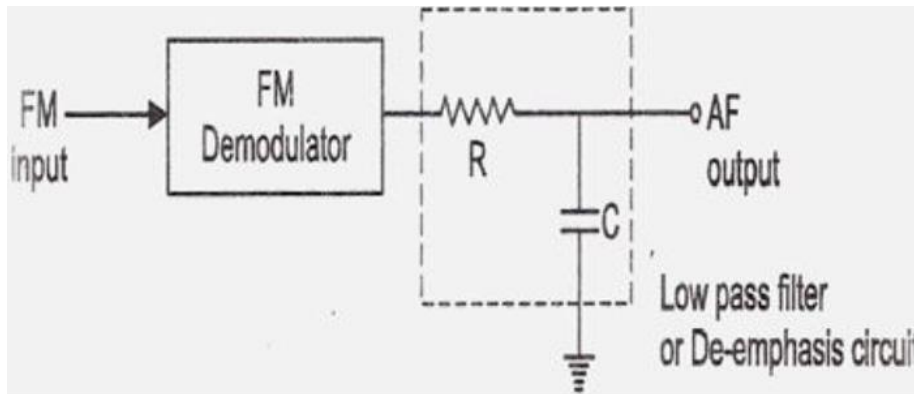


Fig-De emphasis Circuit

1 M per circuit

f) Define fading w.r.t. wave propagation

2M

Ans:

Fading:
The fluctuation in signal strength at a receiver, which is mainly due to the interference of two waves which left the same source but arrived at the destination by different paths, is known as fading.

2M for correct definition

g) Draw sketch of Loop antenna along with its radiation pattern



2M

SUMMER-19 EXAMINATION

Subject Name: Principles of electronic communication

Model Answer

22334

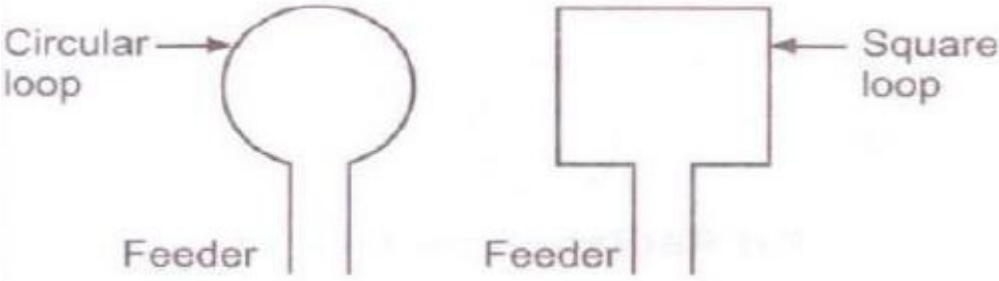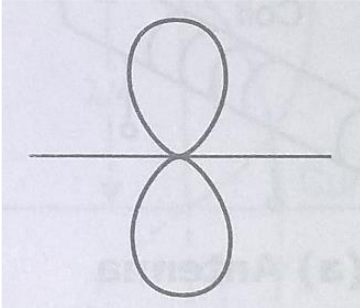Ans:	 <p>Fig: Loop Antenna</p>  <p>Fig: Radiation Pattern</p>	1M sketch & 1M radiation pattern
------	--	----------------------------------

Q. No.	Sub Q. N.	Answers	Marking Scheme
2		Attempt any THREE of the following:	12- Total Marks
	a)	Explain the sources of noise in communication system	4M
	Ans:	<p>Noise: Noise is any spurious or undesired disturbances that mask the received signal in a communication system.</p> <p>a) Atmospheric Noise : Atmospheric Noise is also known as static noise which is the natural source of disturbance caused by lightning, discharge in thunderstorm and the natural disturbances occurring in the nature.</p> <p>b) Industrial Noise : Sources of Industrial noise are auto-mobiles, aircraft, ignition of electric</p>	Any 4 source with brief explanation



SUMMER-19 EXAMINATION

Subject Name: Principles of electronic communication

Model Answer

22334

motors and switching gear.

c) Extraterrestrial Noise : Extraterrestrial Noise exist on the basis of their originating source.

They are Solar Noise

ii) Cosmic Noise

Internal Noise are the type of Noise which are generated internally or within the Communication System or in the receiver. They are as follows:

1) Shot Noise : These Noise rises in the active devices due to the random behaviour of Charge particles or carries. In case of electron tube, shot Noise is produces due to the random emission of electron form cathodes.

2) Partition Noise : When a circuit is to divide in between two or more paths then the noise generated is known as Partition noise. The reason for the generation is random fluctuation the division.

3) Low- Frequency Noise : They are also known as FLICKER NOISE. These type of noise are generally observed at a frequency range below few kHz. Power spectral density of these noise increases with the decrease in frequency. That why the name is given Low- Frequency Noise.

4) High- Frequency Noise : These noises are also known TRANSIT- TIME Noise. They are observed in the semi-conductor devices when the transit time of a charge carrier while crossing a junction is compared with the time period of that signal.

5) Thermal Noise : Thermal Noise are random and often referred as White Noise or Johnson Noise. Thermal noise are generally observed in the resistor or the sensitive resistive components of a complex impedance due to the random and rapid movement of molecules or atoms or electrons.

Dark current noise: When there is no optical power incident on the photodetector a small reverse leakage current still flows from the device terminals. This Dark current contributes to the total system noise and gives random fluctuations about the average particle flow of the photocurrent.

The Dark current noise is given by:

$$i_d^2 = 2eBI_d$$

where e is the charge on an electron

I_d is the dark current

⇒Quantum noise: Discrete nature of electrons cause a signal disturbance called Quantum noise or Shot noise.It arises from the statistical nature of the production and collection of photoelectrons. It is given by

$$i_s^2 = 2eBI_p$$



SUMMER-19 EXAMINATION

Subject Name: Principles of electronic communication

Model Answer

22334

I_p is the photocurrent

b) Explain power relation in AM wave

4M

Ans:

i) The Total power in AM (P_t) :

$$P_t = (\text{Carrier power}) + (\text{Power in USB}) + (\text{Power in LSB})$$

$$P_t = P_c + P_{\text{USB}} + P_{\text{LSB}}$$

$$\therefore P_t = \frac{E_{\text{r}^2 \text{carr}}}{R} + \frac{E_{\text{r}^2 \text{USB}}}{R} + \frac{E_{\text{r}^2 \text{LSB}}}{R} \quad \text{(1 mark)}$$

Where, E_{rcarr} , E_{rUSB} , E_{rLSB} = R.M.S. values of the carrier and side band amplitudes

R = characteristics resistance of antenna in which total power is dissipated.

OR

ii) Carrier power (P_c):

$$P_c = \frac{E_{\text{r}^2 \text{carr}}}{R}$$

$$= \frac{(E\sqrt{2})^2}{R}$$

$$P_c = \frac{E^2 c}{2R}$$

Where, E_c = Peak carrier amplitude

OR

4M for
correct
answer

SUMMER-19 EXAMINATION

Subject Name: Principles of electronic communication

Model Answer

22334

iii) Power in sidebands:

The power in USB and LSB is same as,

$$P_{USB} = P_{LSB} = \frac{Er^2_{SB}}{R}$$

$$\text{Peak amplitude of sideband} = \frac{mEc}{2}$$

$$\therefore P_{USB} = P_{LSB} = \frac{(mEr2\sqrt{2})^2}{R}$$

$$= \frac{m^2 E^2 c}{8R}$$

$$\therefore P_{USB} = P_{LSB} = \frac{m^2}{4} \times \frac{E^2 c}{2R}$$

$$\frac{E^2 c}{2R} = P_c$$

$$\therefore P_{USB} = P_{LSB} = \frac{m^2}{4} P_c$$

Or

iv) Total power in AM :

The total power in AM is,

$$P_t = P_c + P_{USB} + P_{LSB}$$

$$= P_c + \frac{m^2}{4} P_c + \frac{m^2}{4} P_c$$


$$\therefore P_t = \left(1 + \frac{m^2}{2}\right) P_c$$

c) Explain Duct propagation with neat sketch

4M

Ans: Duct propagation: (Microwave Space Wave Propagation)

2M
diagram &
2M
explanation

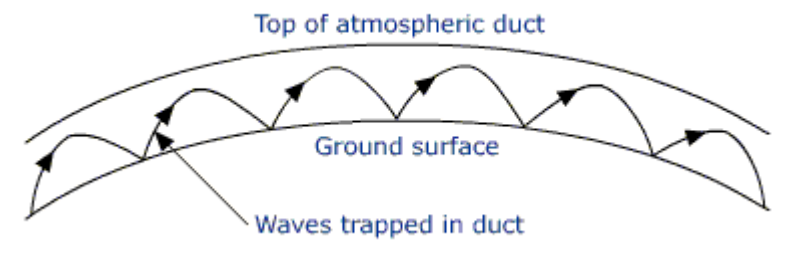

SUMMER-19 EXAMINATION

Subject Name: Principles of electronic communication

Model Answer

22334

Duct propagation is the special type of phenomenon which is also called as “**super refraction**”.

It is observed at very high microwave frequencies.

As the height above the earth increases, the air density decreases and the refractive index increases. The change in the refractive index is normally linear and gradual.

However under certain special atmospheric condition, a layer of warm air may get trapped above the cooler air. This happens usually over the surface of the water.

Due to this the refractive index will decrease more rapidly with height than usual. This happens near the ground normally within a distance of 30 meters above the surface.

Due to this rapid reduction of refractive index, the microwave will completely bend back towards the earth surface.

Microwaves are thus continuously refracted inside the duct and reflected back by the conducting ground or water surface.


These waves then propagate around the curvature of the earth over a distance of 1000 Km.

The region in which super refraction takes place is called duct.

d) Explain the term beam width related to antenna with a sketch

4M

Ans: The beamwidth of an antenna is described as the angles created by comparing the half power points (3 dB) on the main radiation to be its maximum power points.

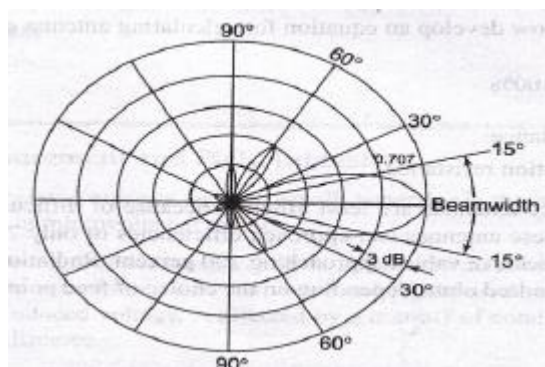

2M
diagram &
2M
explanation

Q. No. Sub Q. N.

Answers

Marking Scheme



SUMMER-19 EXAMINATION

Subject Name: Principles of electronic communication

Model Answer

22334

3	Attempt any THREE of the following :	12- Total Marks
	<p>a) A 500 watts carrier is modulated to depth of 80%</p> <p>Calculate :</p> <p>(i) Total power in AM</p> <p>(ii) Power in side bands</p>	4M
Ans:	<p>Given $\therefore P_c = 500 \text{ watts}$ $m = 80\% = 0.8$</p> <p>i) Total power in AM \Rightarrow — (2M)</p> $P_t = \left(1 + \frac{m^2}{2}\right) \cdot P_c$ $= \left(1 + \frac{0.8^2}{2}\right) \times 500$ $\therefore P_t = 660 \text{ watt}$ <p>ii) Power in side bands \Rightarrow — (2M)</p> $P_{USB} = P_{LSB} = \frac{m^2}{4} \times P_c$ $= \frac{0.8^2}{4} \times 500$ $\therefore P_{USB} = P_{LSB} = 80 \text{ watt}$	2M-for each calculation
	<p>b) A frequency modulated signal is represented by the voltage equation</p> $e_{fm} = 10 \sin (6 \times 10^8 t + 5 \sin 1250 t)$ <p>calculate :</p> <p>(i) Carrier frequency f_c</p> <p>(ii) Modulating frequency f_m</p> <p>(iii) Maximum deviation</p>	4M



SUMMER-19 EXAMINATION

Subject Name: Principles of electronic communication

Model Answer

22334

(iv) What power will this FM wave dissipate in 20 Ω resistor

Ans:

Solⁿ :- A frequency modulated signal is given by -

$$e_{FM} = 10 \sin(6 \times 10^8 t + 5 \sin 1250 t)$$

i) Carrier Frequency, $f_c = ?$

As we know,

$$e_{FM} = 10 \sin(6 \times 10^8 t + 5 \sin 1250 t) \quad \text{--- (given) --- (1)}$$

And,

The standard expression for FM wave is

$$e_{FM} = E_c \sin[(2\pi f_c t) + m_f \sin(2\pi f_m t)] \quad \text{--- (2)}$$

(Comparing eqn (1) and eqn (2))

$$\therefore e_{FM} = 10 \sin(2\pi f_c t + \frac{\delta}{f_m} \sin \omega_m t)$$

$$\therefore 2\pi f_c = 6 \times 10^8$$

$$\therefore f_c = \frac{6 \times 10^8}{2\pi} = 95.492 \times 10^6 \text{ Hz}$$

$$\approx 95.49 \text{ MHz}$$

\therefore Carrier Frequency = 95.5 MHz

ii) Modulating Frequency, $f_m = ?$

Again,

$$\omega_m = 2\pi f_m = 1250$$

$$\therefore f_m = \frac{1250}{2\pi} = 198.94 \text{ Hz}$$

\therefore Modulating Frequency, $f_m = 198.94 \text{ Hz}$

iii) Maximum deviation $\delta = ?$

$$\therefore \frac{\delta_{FM}}{f_m} = 5$$

$$\therefore \delta_{FM} = 5 \times 198.94 \quad \text{--- } (\because f_m = 198.94 \text{ Hz})$$

$$\therefore \delta_{FM} = 994.72 \text{ Hz}$$

\therefore Maximum deviation, $\delta = 994.72 \text{ Hz}$

iv) Power dissipation in 20 Ω resistor, $P = ?$

$$P = \frac{V_{rms}^2}{R} = \frac{(V_c / \sqrt{2})^2}{R}$$

$$\therefore P = \frac{(10 / \sqrt{2})^2}{20} \quad \text{--- } (\because \text{Given } V_c = 10 \text{ V, } R = 20 \Omega)$$

$$\therefore P = 2.5 \text{ W}$$



Scanned with
CamScanner

Power dissipated in 20 Ω resistor, $P = 2.5 \text{ W}$

1M for
each
calculatio
n(each
value)

c) Compare between simple AGC and delayed AGC

4M




SUMMER-19 EXAMINATION

Subject Name: Principles of electronic communication

Model Answer

22334

Ans:

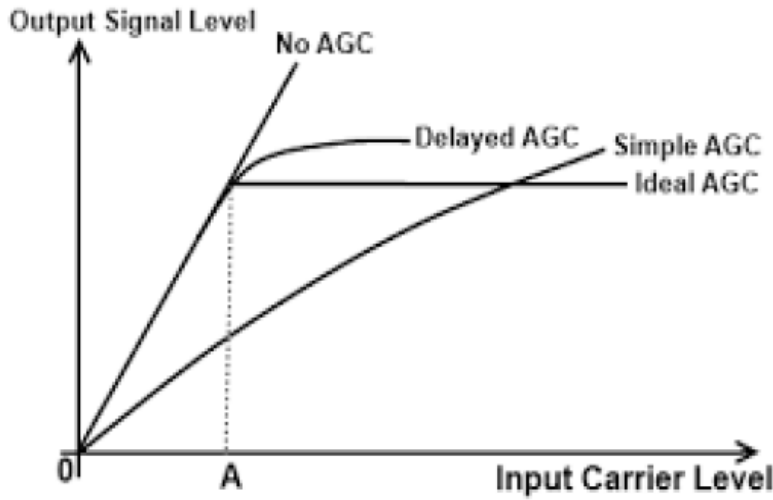

(1M for each correct point)

Parameter	Simple AGC	Delayed AGC
i) Definition	Simple AGC is a system by means of which overall gain of a radio receiver is varied automatically	Delayed AGC is a system which does not reduce the gain for weak signals but reduces the gain for strong signals only.
ii) Advantages	Simplicity, Low cost	High cost
iii) Applications	Simple AGC circuit is used in all the low cost domestic radio receiver.	Delayed AGC is used in the high quality receivers like communication receivers.
iv) Characteristics	Refer Fig Fig 3C –The AGC characteristics	Refer Fig Fig 3C –The AGC characteristics

d) Compare resonant and non resonant antenna on the basis of

4M





- (i) Definition
- (ii) Circuit
- (iii) Reflection coefficient
- (iv) Radiation pattern

SUMMER-19 EXAMINATION

Subject Name: Principles of electronic communication

Model Answer

22334
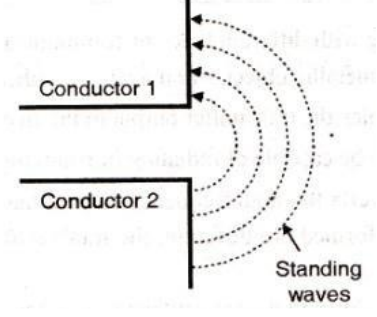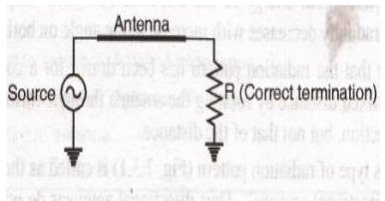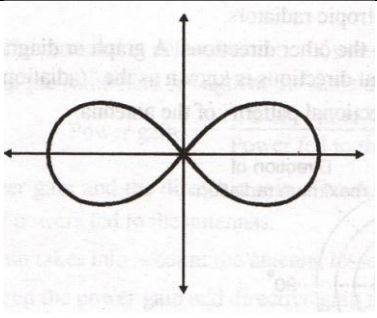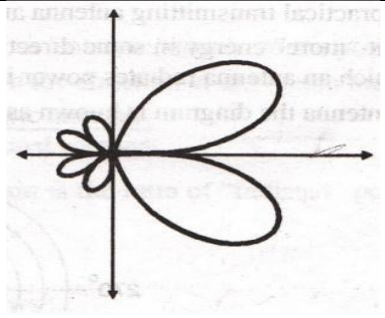
<p>Ans :</p>					<p>(1M for Each Parameter)</p>	
	Parameter	Resonant antenna		Non resonant antenna		
	i) Definition	It is transmission Line of length equal to multiples of $\lambda/2$ and open at both end.		It is transmission line whose length is not a multiple of $\lambda/2$		
	ii) Circuit					
	(iii) Reflection coefficient	Standing wave present		Standing wave not present		
(iv) Radiation pattern						
e)	Differentiate between ground wave and sky wave propagation					
Ans:	Sr. No	Parameters	Ground Wave Propagation	Sky Wave Propagation	<p>Any Four relevant correct points – 1 mark</p>	
	1	Frequency Range	30 kHz to 3 MHz	3 MHz to 30 MHz		
	2	Polarization	Vertical	Vertical		

SUMMER-19 EXAMINATION

Subject Name: Principles of electronic communication

Model Answer

22334

		3	Applications	Radio Broadcasting (MW Range)	Radio Broadcasting (SW Range)
		4	Range of Communication	Less (OR) Few hundred Km	More (OR) Few Thousand Km
		5	Limitations	Limited Range, Tall Antenna Required, High transmission power.	Skip Distance, Power loss due to absorption of energy in layers
		6	Fading Problem	Less	Severe

Q. No.	Sub Q. N.	Answers	Marking Scheme
4		Attempt any THREE of the following :	12- Total Marks
	(a)	Draw the block diagram of basic electronic communication system	4M
	Ans:	<pre> graph LR A[Information Source] --> B[Transmitter] B --> C[Communication Channel] C --> D[Receiver] D --> E[Destination] F[Noise] --> C </pre> <p>Fig: Basic electronic communication system</p>	4M for correct block diagram

SUMMER-19 EXAMINATION

Subject Name: Principles of electronic communication

Model Answer

22334

(b) Differentiate between AM & FM on the basis of

- (i) Definition
- (ii) Band width
- (iii) Modulation index
- (iv) Application

4M

Ans:


SR. NO	PARAMETER	AM	FM
1	Definition	Amplitude of the carrier signal is varied in accordance to the instantaneous value of the modulating signal keeping frequency and phase of carrier constant.	Frequency of the carrier signal is varied in accordance to the instantaneous value of the modulating signal keeping amplitude and phase of carrier constant.
2	Modulation Index	$m = \frac{V_m}{V_c}$	$M_f = \frac{\delta_m}{f_m(\max)}$
3	Bandwidth	BW = 2 fm	BW = 2 (δ+ fm (max))
4	Application (any relevant point to be considered)	Video transmission in TV receivers etc.	Sound transmission in TV receivers etc.

1M-Each difference

(c) Draw the circuit diagram of practical AM diode detector. Sketch its input and output waveforms

4M

Ans:

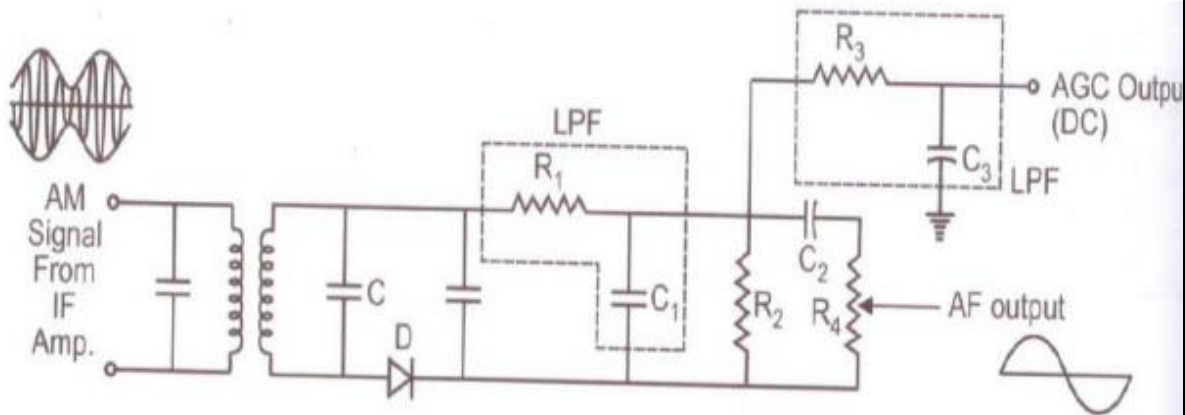

(2M-Circuit Diagram

2M waveforms)

Fig: Circuit diagram of Practical AM diode detector

SUMMER-19 EXAMINATION

Subject Name: Principles of electronic communication

Model Answer

22334

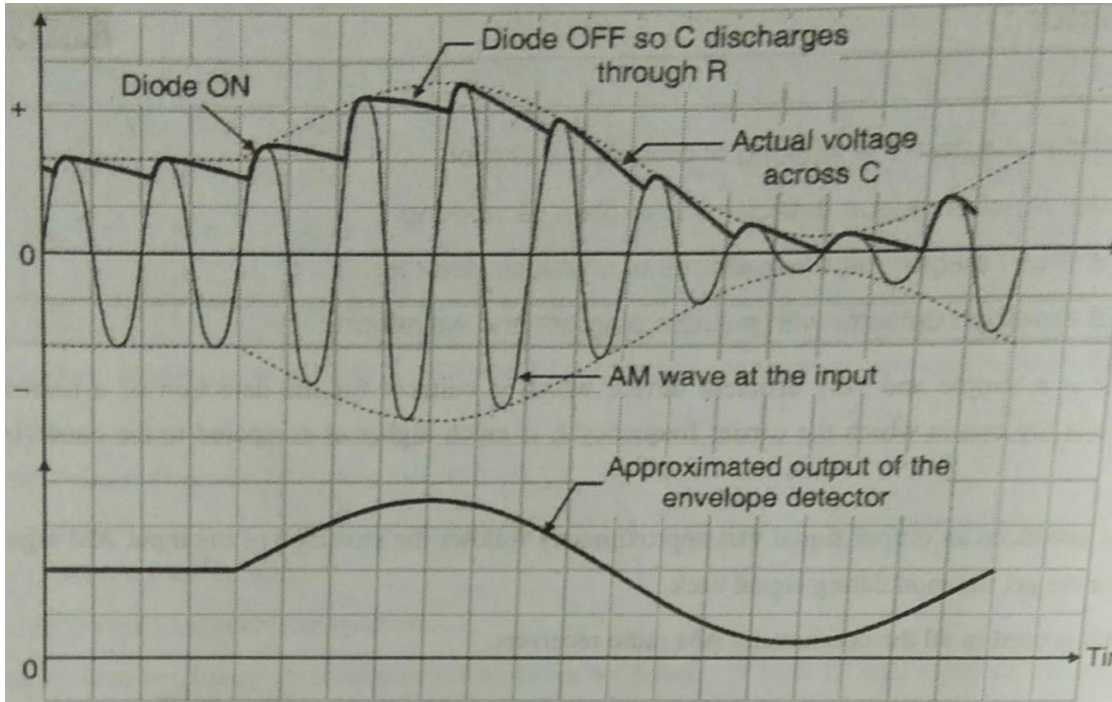


Fig: Input and Output waveforms

(d) Describe the term virtual height with the help of diagram showing ionized layer and path of wave

4M

Ans:

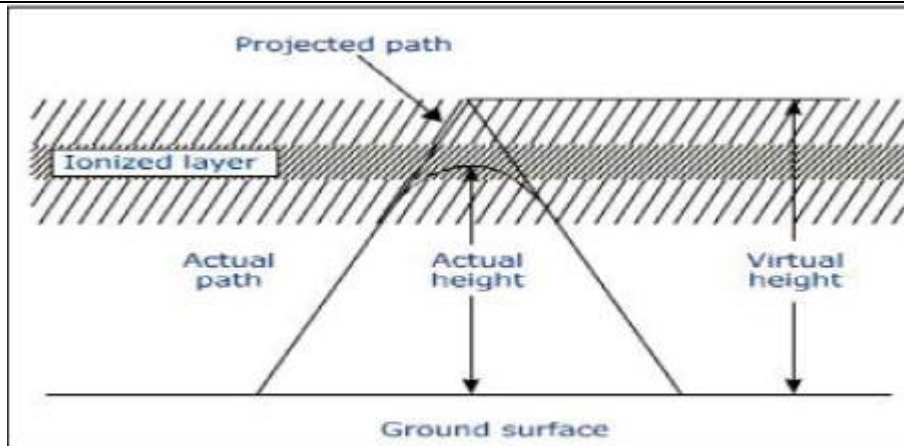


Fig: Virtual height of an ionized layer

Virtual height: -The incident wave returns back to the earth due to refraction. In this process it bends down gradually and not sharply, but the incident and reflected rays follow exactly the same paths as those if the signal have been reflected from a surface

2M Diagram

2M
Description

SUMMER-19 EXAMINATION

Subject Name: Principles of electronic communication

Model Answer

22334


located at greater height.

It is the height above the earth's surface from which a refracted wave appears to have been reflected. It is also defined as the maximum height that the hypothetical reflected wave would have reached.

(e) Draw the construction of Yagi Uda antenna . Draw its radiation pattern and write two applications

4M


Ans:

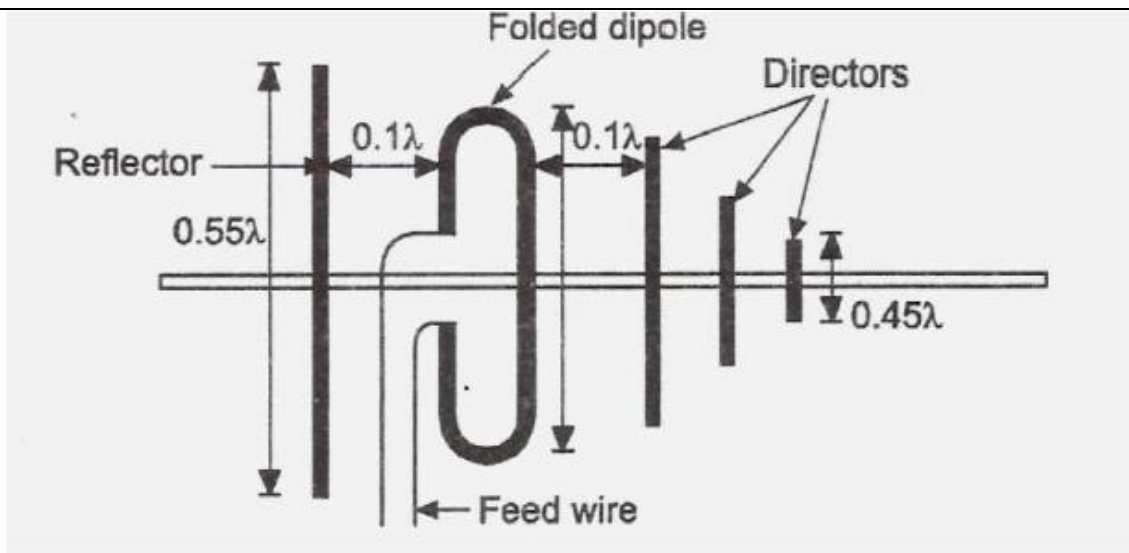

2M construction
1M radiation pattern
1M application

Fig: Yagi Antenna

Radiation pattern:-

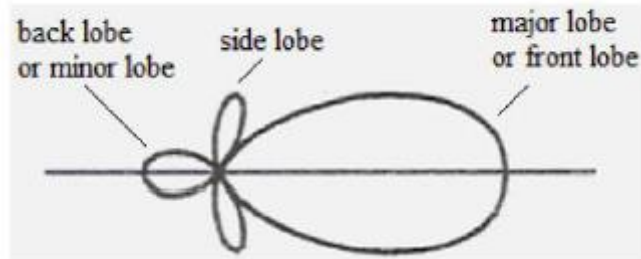

Application:- (any two) :- ½ M each

- 1) It is used as HF transmitting antenna.
- 2) It is used as VHF and UHF as TV receiver antenna because of its physical size.
- 3) A stack of Yagi - Uda antenna can be used as a super gain antenna.



SUMMER-19 EXAMINATION

Subject Name: Principles of electronic communication

Model Answer

22334

Q. No.	Sub Q. N.	Answers	Marking Scheme																								
5.		Attempt any TWO of the following:	12- Total Marks																								
	a)	<p>Write down the range of different frequencies in electro magnetic spectrum for following :</p> <p>(i) Voice frequency</p> <p>(ii) High frequency</p> <p>(iii) Infra red frequency</p> <p>(iv) Visible spectrum (light)</p> <p>(v) Radio frequency</p> <p>(vi) UV frequency</p> <p>Also write one application area of each frequency</p>	6M																								
	Ans:	<table border="1"> <thead> <tr> <th>Sr No.</th> <th>Frequency</th> <th>Range</th> <th>Application</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Voice frequency</td> <td>300 Hz to 3KHz</td> <td>transmission of speech</td> </tr> <tr> <td>2</td> <td>High frequency</td> <td>3MHz to 30 MHz</td> <td>SW band of AM Rx</td> </tr> <tr> <td>3</td> <td>Infra red frequency</td> <td>3 THz to 30 THz</td> <td>Used for directed links e.g. to connect different buildings via laser links.</td> </tr> <tr> <td>4</td> <td>Visible spectrum (light)</td> <td>375 THz to 750 THz</td> <td>Smart Lighting, Mobile Connectivity</td> </tr> <tr> <td>5</td> <td>Radio frequency</td> <td>3 kHz-300 GHz</td> <td>radar signals or communications</td> </tr> </tbody> </table>	Sr No.	Frequency	Range	Application	1	Voice frequency	300 Hz to 3KHz	transmission of speech	2	High frequency	3MHz to 30 MHz	SW band of AM Rx	3	Infra red frequency	3 THz to 30 THz	Used for directed links e.g. to connect different buildings via laser links.	4	Visible spectrum (light)	375 THz to 750 THz	Smart Lighting, Mobile Connectivity	5	Radio frequency	3 kHz-300 GHz	radar signals or communications	1M each for correct range & application (1/2 M range & 1/2 M application)
Sr No.	Frequency	Range	Application																								
1	Voice frequency	300 Hz to 3KHz	transmission of speech																								
2	High frequency	3MHz to 30 MHz	SW band of AM Rx																								
3	Infra red frequency	3 THz to 30 THz	Used for directed links e.g. to connect different buildings via laser links.																								
4	Visible spectrum (light)	375 THz to 750 THz	Smart Lighting, Mobile Connectivity																								
5	Radio frequency	3 kHz-300 GHz	radar signals or communications																								



SUMMER-19 EXAMINATION

Subject Name: Principles of electronic communication

Model Answer

22334

	6	UV frequency	3 - 30 PHZ	Pool water purification	
b)	<p>Explain why the local oscillator frequency should be always greater than signal frequency in radio receiver. A Superhetrodine radio receiver with an IF of 455 kHz is turned to 1000kHz. Find its image frequency and local oscillator frequency.</p>				6M
Ans:	<p>Reason for local oscillator frequency to be greater than signal frequency in radio receiver:</p> <p>The local oscillator frequency is made greater than signal frequency in radio receiver.</p> <p>Local oscillator frequency range is 995 KHz to 2105 KHz for MW band.</p> $F_{\max}/F_{\min}=2105/995=2.2$ <p>If local oscillator has been designed to be below signal frequency, the range would be 85 to 1195KHz and frequency ratio is $F_{\max}/F_{\min}=1195/85=14.0$</p> <p>The normal tunable capacitance ratio is $C_{\max}/C_{\min}=10$</p> <p>So this capacitance ratio easily gives the frequency ratio of 2:2:1</p> <p>Hence the 2:2:1 ratio required for the local oscillator operating above signal frequency is well within range whereas the other system has a frequency ratio of 14:1 whose capacitance are not practically available.</p> <p>Numerical:</p> <p>A signal (image) can interfere with a superheterodyne receiver if fits the following equation.</p> $\text{Image} = \text{Signal} \pm 2 \times \text{I.F.}$ <p>Which says that a signal has the capacity to interfere with a superhet receiver if its frequency is equal to the signal frequency (1000 kHz in our question) plus or minus twice the IF (455 kHz in our question).</p> <p>So one possible image is: $1000 + (2 \times 455) = 1910 \text{ kHz}$</p> <p>And the other: $1000 - (2 \times 455) = 90 \text{ kHz}$</p> <p>local oscillator frequency = $455 + 1000 = 1455 \text{ KHz}$</p>				3M for correct answer & 3M for Numericals
c)	<p>Name the different layers of atmosphere which satisfy following conditions :</p> <p>(i) Reflects LF, absorbs MF and HF waves to some degree</p>				6M



SUMMER-19 EXAMINATION

Subject Name: Principles of electronic communication

Model Answer

22334

- (ii) Helps surface waves and reflect HF waves
- (iii) Partially absorbs HF waves yet allowing them to reach its upper layer
- (iv) Efficiently reflects HF waves , specially in night
- (v) Exists in day time only
- (vi) Exists in day time but merges with F2 layer in night time

Ans:

Sr No.	Name of the layer of atmosphere	Frequencies most affected
1	D (Part of Stratosphere)	Reflects LF, absorbs MF and HF waves to some degree
2	E (Part of Stratosphere)	Helps surface waves and reflect HF waves
3	F1 (Part of mesosphere)	Partially absorbs HF waves yet allowing them to reach its upper layer
4	F2 (Thermosphere)	Efficiently reflects HF waves , specially in night
5	D & E (Part of Stratosphere)	Exists in day time only
6	F1 (Part of mesosphere)	Exists in day time but merges with F2 layer in night time

1M each

Q. No.	Sub Q. N.	Answers	Marking Scheme
6.		Attempt any TWO of the following :	12- Total Marks
	a)	<p>Explain the effect modulation index on AM wave with waveforms for</p> <ul style="list-style-type: none"> (i) $m < 1$ (ii) $m = 1$ (iii) $m > 1$ 	6M
	Ans:	<p>i) $m < 1$</p> <ul style="list-style-type: none"> • If $m < 1$ or if the percentage of modulation is less than 100% then this type of modulation is known as under modulation . 	(2 M for each effect with waveform


SUMMER-19 EXAMINATION

Subject Name: Principles of electronic communication

Model Answer


22334

- The amplitude of modulating signal less than carrier amplitude, no distortion will occur.

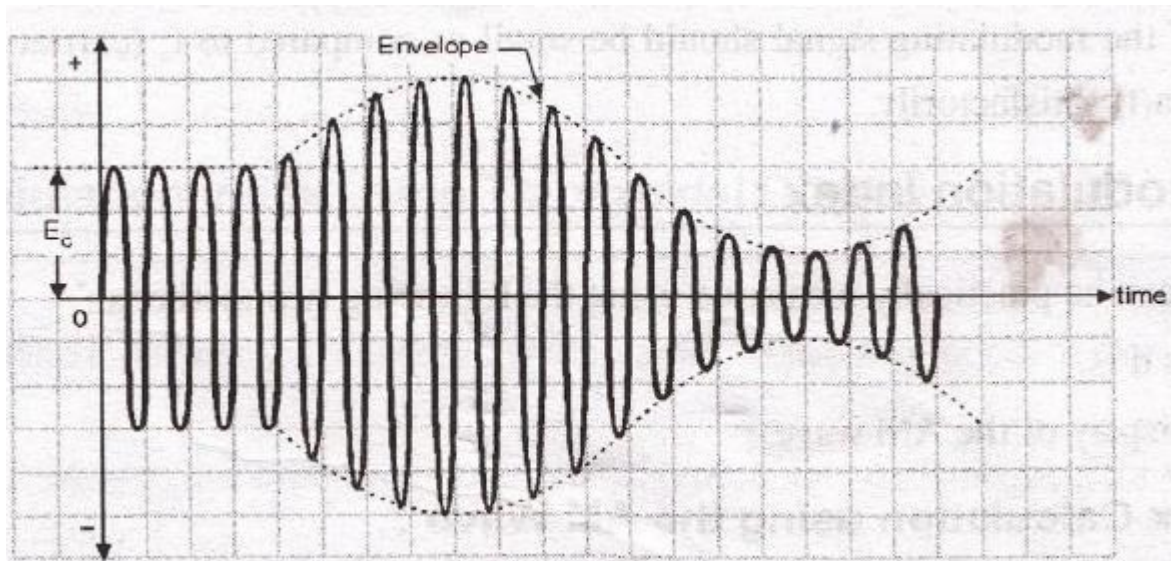

ii) $m = 1$

- If $m = 1$ or percentage of modulation is 100 this type modulation is **100% modulation**
- The ideal condition for AM is $m = 1$, since this will produce the greatest output at the receiver with no distortion.

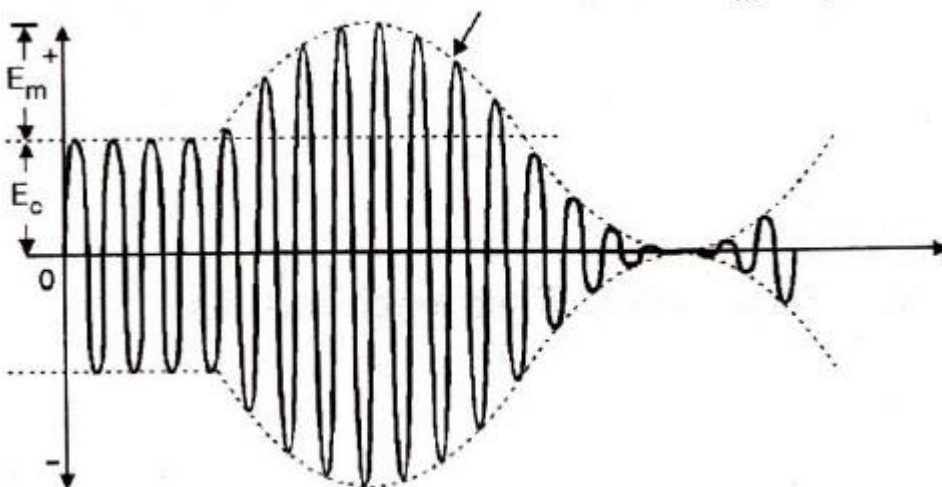

(iii) $m > 1$

- If $m > 1$ or if the percentage of modulation is greater than 100% then this type of modulation is known as **overmodulation**.
- The amplitude of modulating signal greater than carrier amplitude. For $m > 1$ the

SUMMER-19 EXAMINATION


Subject Name: Principles of electronic communication

Model Answer

22334

envelope can sometimes reverse the phase.


- overmodulation introduces envelope distortion. Hence it should be avoided.

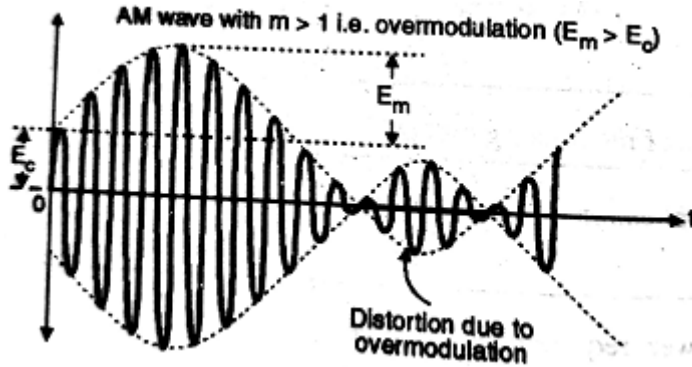

b) Explain the working of AM super heterodyne receiver with the help of neat block diagram and waveform

6M

Ans:

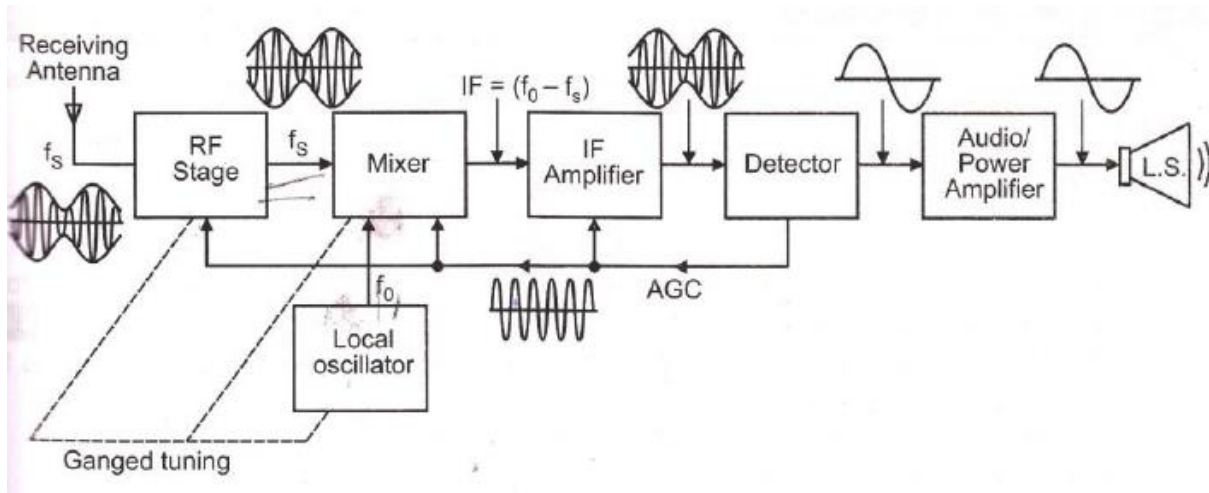

2 M-
Diagram, 1
M-
waveform, 3M-
Explaination

AM super heterodyne receiver works on the principle of super heterodyning.

In the super heterodyne receiver, the incoming signal voltage is combined with a signal generated in the receiver. The local oscillator voltage is normally converted into a signal of a low fixed frequency with the help of mixer.

The signal at this intermediate frequency contains the same modulation as the original carrier and it is now amplified and detected to reproduce the original modulating signal

Functions of each block-

Receiving antenna- AM receiver operates in the frequency range of 540 KHz to 1640



SUMMER-19 EXAMINATION

Subject Name: Principles of electronic communication

Model Answer

22334

KHz.
RF stage- Selects wanted signal and rejects all other signals and thus reduces the effect of noise.
Mixer- Receives signal from RF stage F_s and the local oscillator F_o , and are mixed to produce intermediate frequency signal IF which is given as:
 $IF = F_o - F_s$
Ganged Tuning- To maintain a constant difference between the local oscillator and RF signal frequency, gang capacitors are used.
IF stage- The IF signal is amplified by the IF amplifier with enough gain.
Detector- Amplified signal is detected by the detector to get original modulating signal. The detector also provides control signals to control the gain of IF and RF stage called as AGC.
AGC- Automatic gain control controls the gain of RF and IF amplifiers to maintain a constant output level at the speaker even though the signal strength at the antenna varies.

c) Explain following terms in short related to antenna

- (i) Antenna resistance
- (ii) Directivity
- (iii) Antenna gain
- (iv) Power density
- (v) Radiation pattern
- (vi) Polarization

6M

Ans: (i) Antenna resistance:-

The resistance of an antenna has two components:
 1. Its radiation resistance due to conversion of power into electromagnetic waves
 2. The resistance due to actual losses in the antenna.

or

The antenna resistance has two components:

1. Radiation resistance: it is defined as the ratio of the power radiated by the antenna to square of the current at the input of the antenna feed point.

$$R_r = \frac{P_t}{I^2}$$

1 M for each correct definition



SUMMER-19 EXAMINATION

Subject Name: Principles of electronic communication

Model Answer

22334

Where

P_t is radiated power by antenna

I is the current at feed point

2. Resistance due to actual losses in the antenna

(ii) Directivity:-

The directive gain can be defined in any direction. However directivity means the maximum directive gain which is obtained in only one direction in which the radiation is maximum.

Therefore **Directivity = Maximum Directive gain.**

OR

The directive gain is defined as the ratio of the power density in a particular direction of one antenna to the power density that would be radiated by an omnidirectional antenna (isotropic antenna).

The maximum directive gain is called directivity.

(iii) Antenna gain:-

Antenna Gain –

The directional antenna radiate more power in certain direction. The Omni-directional antenna radiates information equally in all directions.

Or

Antenna gain

It is the ratio of focused transmitted power (P_t) to the input power of the antenna (P_i)

Or

Antenna gain: antenna gain is defined as the ratio of the power density radiated in a particular direction to the power density radiated to the same point by the reference antenna.

(iv) Power density:-

The EM waves cause the energy to flow from one point to the other in the direction of propagation.

The power density is defined as the rate at which energy passes through a given surface area

SUMMER-19 EXAMINATION

Subject Name: Principles of electronic communication

Model Answer

22334

in free space.

Therefore,

Power density = Energy per unit time per unit area.

(v) Radiation pattern:-

The transmitting antenna transmit more energy in some directions than the other directions.

A graph or diagram which tells us about the manner in which an antenna radiates power in different directions is known as the "Radiation Pattern of antenna".

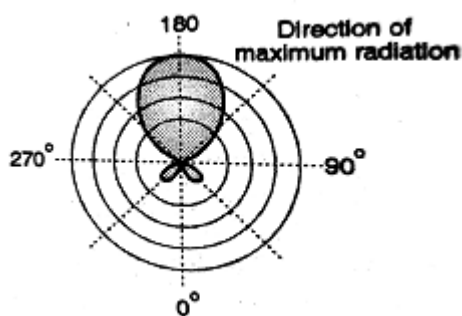


Fig.- Radiation Pattern of an antenna

(vi) Polarization:-

Polarization is defined as the direction of the electric vector in the electromagnetic wave radiated from an antenna.

OR

The polarization of a plane EM wave is simply the orientation of the electric field vector with respect to the surface (i.e. looking at the horizon)



V2V EDTECH LLP

Online Coaching at an Affordable Price.

OUR SERVICES:

- Diploma in All Branches, All Subjects
- Degree in All Branches, All Subjects
- BSCIT / CS
- Professional Courses



+91 93260 50669



v2vedtech.com



V2V EdTech LLP



v2vedtech



WINTER – 19 EXAMINATION



Subject Name: Principles of Electronic Communication Model Answer


Subject Code: **22334**

Important Instructions to examiners:

- 1) The answers should be examined by key words and not as word-to-word as given in the model answer scheme.
- 2) The model answer and the answer written by candidate may vary but the examiner may try to assess the understanding level of the candidate.
- 3) The language errors such as grammatical, spelling errors should not be given more importance (Not applicable for subject English and Communication Skills).
- 4) While assessing figures, examiner may give credit for principal components indicated in the figure. The figures drawn by candidate and model answer may vary. The examiner may give credit for any equivalent figure drawn.
- 5) Credits may be given step wise for numerical problems. In some cases, the assumed constant values may vary and there may be some difference in the candidate's answers and model answer.
- 6) In case of some questions credit may be given by judgement on part of examiner of relevant answer based on candidate's understanding.
- 7) For programming language papers, credit may be given to any other program based on equivalent concept.

Q. No.	Sub Q. N.	Answer	Marking Scheme
Q.1		Attempt any FIVE of the following:	10 M
	a)	Define the term signal to noise ratio.	2M
	Ans:	Signal to Noise ratio: The ratio of the strength of an electrical or other signal carrying information to that of unwanted interference is called as signal to noise ratio. OR Signal to Noise Ratio is defined as the ratio of signal power to the noise power at the same point. $S/N = P_s/P_n$ where, P_s = Signal Power P_n = Noise Power at the same point	Definition: 2 marks
	b)	Define modulation index of FM.	2M
	Ans:	Modulation index of FM is defined as the ratio of the frequency deviation to the modulating frequency. $M.I. = \Delta f / f_m$ Where Δf - frequency deviation f_m - modulating frequency	2M
	c)	Write Carson's rule to calculate BW of FM wave.	2M
	Ans:	Carson's Rule for FM bandwidth $B.W. = 2(\Delta f + f_m)$ Where: Δf = deviation f_m = modulating frequency	rule 2M
	d)	Draw the labelled circuit dia. Of ratio detector.	2M

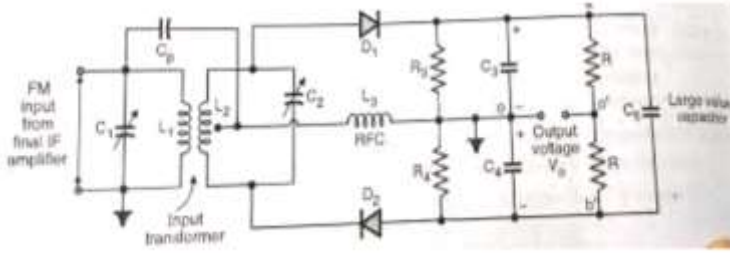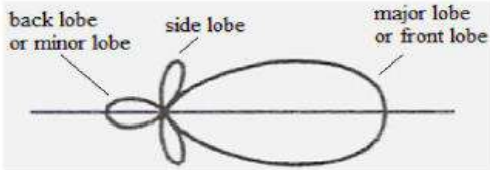	Ans:		Ckt. Diagram: 2 marks
e)		<p>Write the IF value of</p> <p>(i) FM ratio receiver.</p> <p>(ii) MW band AM.</p>	2M
Ans:		<p>(i) 10.7 Mhz</p> <p>(ii) 455 KHz</p>	1 mark each
f)		<p>Define fading w.r.t. wave propagation.</p>	2M
Ans:		<p>Fading: The fluctuation in signal strength at a receiver, which is mainly due to the interference of two waves which left the same source but arrived at the destination by different paths, is known as fading.</p>	Definiton 2M
g)		<p>Sketch the radiation pattern of Yagi-Uda antenna.</p>	2M
Ans:		<p>Radiation pattern:-</p> 	Pattern 2M

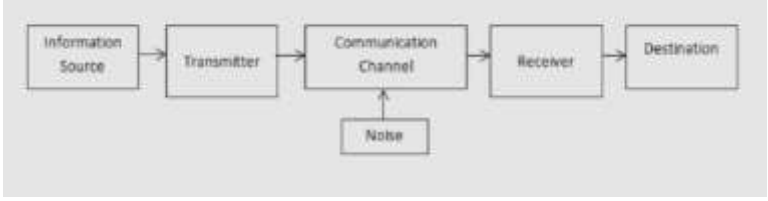Q.2		<p>Attempt any THREE of the following:</p>	12 M
a)		<p>Draw the basic block diagram of Electronic communication system. State the function of transmitter.</p>	4M
Ans :		<p>Block diagram:</p>  <ul style="list-style-type: none"> • Transmitter The function of the transmitter is to process the electrical signal from different aspects. For example in radio broadcasting the electrical signal obtained from sound signal, is processed to restrict its range of audio frequencies (up to 5 kHz in amplitude modulation radio broadcast) and is often amplified. In wire telephony, no real processing is needed. However, in long-distance radio communication, signal amplification is necessary before modulation. Modulation is the main function of the transmitter. In modulation, the message signal is 	<p>Block diagram: 2 Marks,</p> <p>Function: 2 Marks</p>

superimposed upon the high-frequency carrier signal.
In short, we can say that inside the transmitter, signal processing such as restriction of range of audio frequencies, amplification and modulation of signal are achieved.
All these processing of the message signal are done just to ease the transmission of the signal through the channel.

b) A 10kW carrier is amplitude modulated by two sine to a depth of 0.5 & 0.6 respectively. Calculate total power of modulated carrier.

4M

Ans
:

$$\begin{aligned}
 P_c &= 10 \text{ kW} = 10,000 \text{ W} \\
 m_1 &= 0.5 \\
 m_2 &= 0.6 \\
 P_{t1} &= P_c \left(1 + \frac{m_1^2}{2}\right) \\
 &= 10,000 \left(1 + \frac{(0.5)^2}{2}\right) \\
 &= 11,250 \text{ watt} \\
 P_{t1} &= 11,250 \text{ watt} \\
 P_{t2} &= P_c \left(1 + \frac{m_2^2}{2}\right) \\
 &= 10,000 \left(1 + \frac{(0.6)^2}{2}\right) \\
 &= 10,000 \left(1 + \frac{0.36}{2}\right) \\
 &= 11,800 \text{ watt} \\
 P_{t2} &= 11,800 \text{ watt} \\
 P_t &= P_{t1} + P_{t2} \\
 &= 11,250 + 11,800 \\
 &= 23,050 \text{ W} \\
 \text{Total power} &= 23.05 \text{ kW}
 \end{aligned}$$

Calculation
of Pt1- 1.5
Marks,
Pt2- 1.5
Marks, Pt-
1 Marks

c) Compare AM & FM w.r.t. following points.

- (i) Definition
- (ii) Modulation index
- (iii) Bandwidth
- (iv) Application

4M

Ans
:

SR. NO	PARAMETER	AM	FM
1	Definition	Amplitude of the carrier signal is varied in accordance to the instantaneous value of the modulating signal keeping frequency and phase of carrier constant.	Frequency of the carrier signal is varied in accordance to the instantaneous value of the modulating signal keeping amplitude and phase of carrier constant.
2	Modulation Index	$m = \frac{V_m}{V_c}$	$M_f = \frac{\delta_m}{f_m(\max)}$
3	Bandwidth	BW = 2 fm	BW = 2 (δ + fm (max))
4	Application (any relevant point to be considered)	Video transmission in TV receivers etc.	Sound transmission in TV receivers etc.

4 Points
4M

d) Explain the concept of De-emphasis with neat diagram.

4M

Ans
:

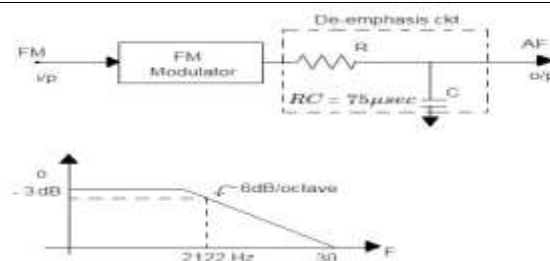


diagram
2M
,Explanatio
n 2M



- In the De-emphasis circuit, by reducing the amplitude level of the received high frequency signal by the same amount as the increase in pre-emphasis is termed as De-emphasis.
- The pre-emphasis process is done at the transmitter side, while the de-emphasis process is done at the receiver side.
- Thus a high frequency modulating signal is emphasized or boosted in amplitude in transmitter before modulation. To compensate for this boost, the high frequencies are attenuated or de-emphasized in the receiver after the demodulation has been performed. Due to pre-emphasis and de-emphasis, the S/N ratio at the output of receiver is maintained constant.
- The de-emphasis process ensures that the high frequencies are returned to their original relative level before amplification.
- Pre-emphasis circuit is a high pass filter or differentiator which allows high frequencies to pass, whereas de-emphasis circuit is a low pass filter or integrator which allows only low frequencies to pass.

Q.3

Attempt any THREE of the following:

12 M

a)

Compare narrow band FM with wide-band FM w.r.t. following points.

- Modulation index
- Maximum deviation
- Range of modulating frequency
- Application

4M

Ans
:

Sr. No	Parameters	Narrow band FM	Wide band FM
1	Modulation index	Less than or slightly greater than 1	Greater than 1
2	Maximum deviation	5 KHz	75 KHz
3	Range of modulating frequency	30Hz to 3 KHz	30Hz to 15 KHz
4	Application	FM mobile communication like police wireless, ambulance etc.	Entertainment broadcasting can be used for high quality music transmission

1M for each correct point


b)

Sketch AM signal in (1)Time domain (2)Frequency domain.

4M


Ans
:

AM in Time domain

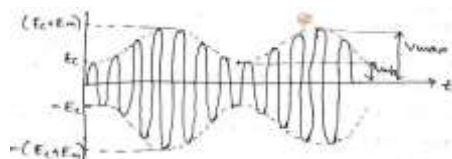

2M-time domain ,
2M-frequency domain

dielectric as its substrate, the length of the antenna decreases as the relative dielectric constant of the substrate increases. The resonant length of the antenna is slightly shorter because of the extended electric "fringing fields" which increase the electrical length of the antenna slightly. An early model of the microstrip antenna is a section of microstrip transmission line with equivalent loads on either end to represent the radiation loss.

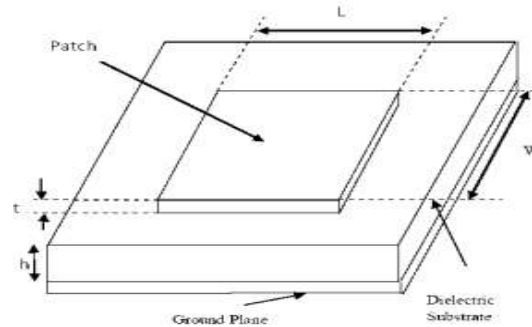

2M-
Diagram

Q.4

Attempt any THREE of the following:


12 M

a) Explain Electromagnetic spectrum.

4M

Ans : The information signal should be first converted into an electromagnetic signal before transmission because the wireless transmission takes place using electromagnetic waves. The electromagnetic waves are oscillations which propagate through free space. The electromagnetic wave consists of both electric and magnetic fields. The electromagnetic waves can travel a long distance through space. In electromagnetic waves, the direction of electric field, magnetic field & propagation are mutually perpendicular. Since the oscillations are perpendicular to direction of propagations of waves they are said to be transverse waves. The frequency of electromagnetic signals ranges from few Hertz to several GHz. This entire range of frequency of EM waves is called EM spectrum.

2M
explanation

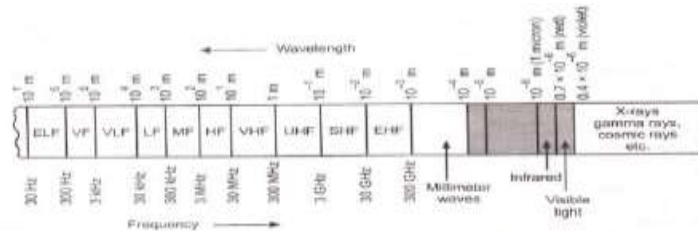

2M-
diagram

b) Draw the block diagram of AM. Super heterodyne ratio receiver and state the function of each block

4M

Ans :

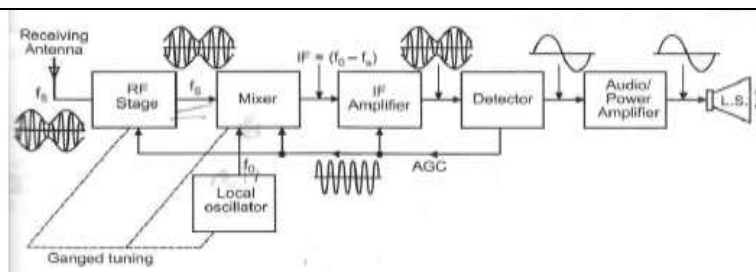




diagram
- 2M,

AM super heterodyne receiver works on the principle of super heterodyning. In the super heterodyne receiver, the incoming signal voltage is combined with a Signal generated in the receiver. The local oscillator voltage is normally converted into a signal of a low fixed frequency with the help of mixer.

explanation
- 2M



	<p>The signal at this intermediate frequency contains the same modulation as the original carrier and it is now amplified and detected to reproduce the original modulating signal.</p> <p>Functions of each block-</p> <p>Receiving antenna- AM receiver operates in the frequency range of 540 KHz to 1640 KHz.</p> <p>RF stage- Selects wanted signal and rejects all other signals and thus reduces the effect of noise.</p> <p>Mixer- Receives signal from RF stage F_s and the local oscillator F_o, and are mixed to produce intermediate frequency signal IF which is given as: $IF = F_o - F_s$</p> <p>Ganged Tuning- To maintain a constant difference between the local oscillator and RF signal frequency, gang capacitors are used.</p> <p>IF stage- The IF signal is amplified by the IF amplifier with enough gain.</p> <p>Detector- Amplified signal is detected by the detector to get original modulating signal. The detector also provides control signals to control the gain of IF and RF stage called as AGC.</p> <p>AGC- Automatic gain control controls the gain of RF and IF amplifiers to maintain a constant output level at the speaker even though the signal strength at the antenna varies.</p>														
c)	<p>In FM if max. Deviation is 75kHz and the max. Modulating frequency is 10 kHz. Calculate the deviation ratio and bandwidth of FM.</p>				4M										
Ans :	<p>Given:- $\delta_{\max} = 75 \text{ KHz}$ $f_m = 10 \text{ KHz}$ i) Deviation Ratio = $\delta_{\max} / f_{m(\max)}$ $= 75 \text{ KHz} / 10 \text{ KHz}$ $= 7.5$ Deviation Ratio = 7.5 ii) Bandwidth = $2(\delta_{\max} + f_{m(\max)})$ $= 2 \times (75 + 10) \text{ KHz}$ $= 170 \text{ KHz}$ Bandwidth = 170 KHz</p>				2M- Deviation ratio, 2M- bandwidth										
d)	<p>Compare sky wave and space wave propagation w.r.t. following points.</p> <p>(i) Frequency range (ii) Effect of fading (iii) Polarization (iv) Application</p>				4M										
Ans :	<table border="1"> <thead> <tr> <th>Sr. No</th> <th>Parameters</th> <th>Sky Wave Propagation</th> <th>Space Wave Propagation</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Frequency range</td> <td>3 MHz to 30 MHz</td> <td>Above 30 MHz</td> </tr> <tr> <td>2</td> <td>Effect of fading</td> <td>Problem of fading is severe</td> <td>Fading is not severe but shadow zones due to tall objects and ghost interference are serious problems.</td> </tr> </tbody> </table>	Sr. No	Parameters	Sky Wave Propagation	Space Wave Propagation	1	Frequency range	3 MHz to 30 MHz	Above 30 MHz	2	Effect of fading	Problem of fading is severe	Fading is not severe but shadow zones due to tall objects and ghost interference are serious problems.	1M for each correct point	
Sr. No	Parameters	Sky Wave Propagation	Space Wave Propagation												
1	Frequency range	3 MHz to 30 MHz	Above 30 MHz												
2	Effect of fading	Problem of fading is severe	Fading is not severe but shadow zones due to tall objects and ghost interference are serious problems.												

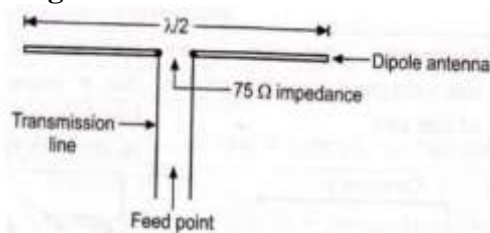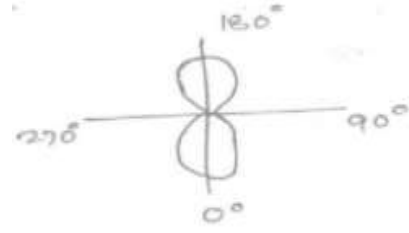		3	Polarization	Vertical	Line of Sight Propagation with waves horizontally Polarized	
		4	Application	Radio Broadcasting (SW Range)	Used for TV and FM broadcasting	
e)	Explain the working of half dipole antenna with its radiation pattern.					4M
Ans :	<p>Half wave dipole antenna diagram</p>  <p>Explanation:</p> <ol style="list-style-type: none"> 1. It is a resonant antenna 2. It is exact half wavelength ($\lambda/2$) long & open circuited at one end. 3. The dipole antennas have lengths $\lambda/2$, λ, $3\lambda/2$ etc. which are all multiple of $\lambda/2$. Hence they are resonant. 4. In half wave dipole antennas the forward waves & reflected waves exist. Hence radiation pattern is bidirectional. <p>The radiation pattern of half wave dipole antenna is –</p> 					<p>Diagram -1M</p> <p>Explanation-2M</p> <p>Radiation pattern-1M</p>
Q.5	Attempt any TWO of the following:					12 M
(a)	Derive a mathematical expression for AM wave.					6M

<p>Ans :</p>		<p>6 M</p>
<p>(b)</p>	<p>A 400 W carrier is amplitude modulated to a depth of 75%. Calculate the total power in AM wave. (i) Explain the types of noise in a communication system. (ii) Compare simplex and duplex mode of communication.</p>	<p>6M</p>
<p>Ans :</p>	<p>(i) Noise: Noise is any spurious or undesired disturbances that mask the received signal in a communication system. a) Atmospheric Noise: Atmospheric Noise is also known as static noise which is the natural source of disturbance caused by lightning, discharge in thunderstorm and the natural disturbances occurring in the nature. b) Industrial Noise: Sources of Industrial noise are auto-mobiles, aircraft, ignition of electric motors and switching gear. c) Extraterrestrial Noise: Extraterrestrial Noise exist on the basis of their originating source. They are i) Solar Noise ii) Cosmic Noise Internal Noise are the type of Noise which are generated internally or within the Communication System or in the receiver. They are as follows: 1) Shot Noise : These Noise rises in the active devices due to the random behaviour of Charge particles or carries. In case of electron tube, shot Noise is produces due to the random emission of electron form cathodes.</p>	<p>2M problem,2 M for noise,2M Compariso n any 2 points 2M</p>

2) Partition Noise : When a circuit is to divide in between two or more paths then the noise generated is known as Partition noise. The reason for the generation is random fluctuation the division.

3) Low- Frequency Noise : They are also known as FLICKER NOISE. These type of noise are generally observed at a frequency range below few kHz. Power spectral density of these noise increases with the decrease in frequency. That why the name is given Low- Frequency Noise



4) High- Frequency Noise : These noises are also known TRANSIT- TIME Noise. They are observed in the semi-conductor devices when the transit time of a charge carrier while crossing a junction is compared with the time period of that signal.

5) Thermal Noise: Thermal Noise are random and often referred as White Noise or Johnson Noise. Thermal noises are generally observed in the resistor or the sensitive resistive components of a complex impedance due to the random and rapid movement of molecules or atoms or electrons. Dark current noise: When there is no optical power incident on the photodetector a small reverse leakage current still flows from the device terminals. This Dark current contributes to the total system noise and gives random fluctuations about the average particle flow of the photocurrent.

The Dark current noise is given by: where e is the charge on an electron I_d is the dark current

Quantum noise: Discrete nature of electrons cause a signal disturbance called Quantum noise or Shot noise. It arises from the statistical nature of the production and collection of photoelectrons.

(ii) comparison of Simplex and Duplex

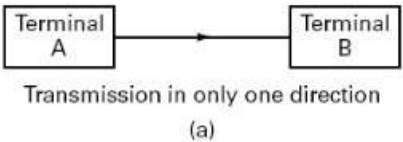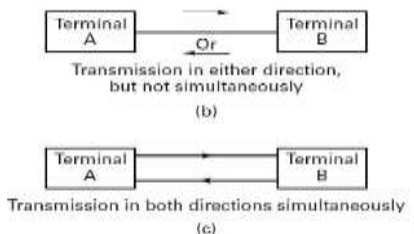Sr. No.	Simplex	Duplex
1.	It is one way communication	It is a two way communication
2.	Information is communicated in only one direction.	Information can transmit as well as receives simultaneously or not simultaneously.
3.	Examples- TV broadcasting, radio broadcasting, telemetry, remote control	Examples- Walkytalky, telephone, mobile, Radar, FAX, Pager
4.		

(c) **(i) Write any one application of the following range.**

1. Radio frequency
2. IR frequency
3. Medium frequency




3M

Ans :

Application of

1. **Radio Frequency-** Radar signals and communication
2. **IR Frequency-** LED, Laser, TV remote, Used for directed links e.g. to connect different buildings via laser links.
3. **Medium Frequency-** AM broadcasting.

1M each

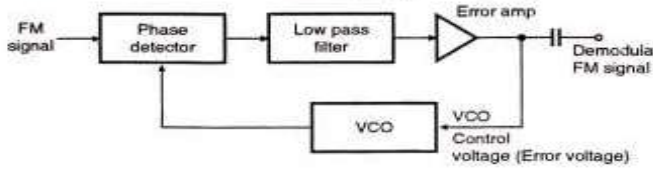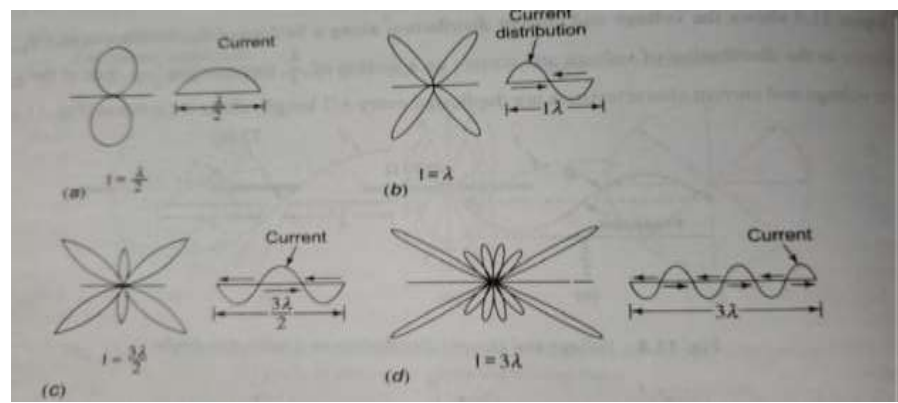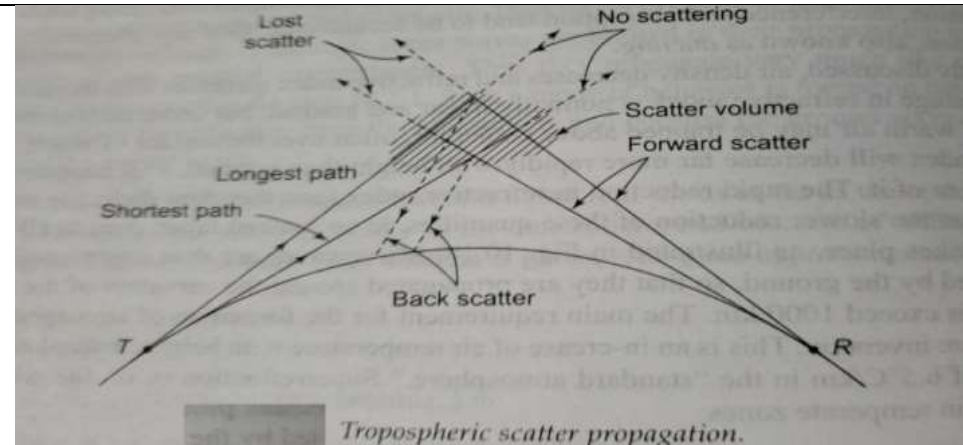	<p>(ii) Draw and label PLL based FM detector.</p>	<p>3M</p>
<p>Ans :</p>	<p>FM Detection Using PLL : A PLL can be used as FM demodulator as shown in Fig.</p>  <p>Fig. PLL. used as FM demodulator</p>	<p>3M diagram</p>
<p>Q.6</p>	<p>Attempt any TWO of the following:</p>	<p>12 M</p>
<p>(a)</p>	<p>(i) List any two advantages of folded dipole antenna. (ii) Draw the radiation patterns of the following resonant dipole antenna. 1. $l=2\lambda$ 2. $l=\lambda$ 3. $l=3\lambda/2$ 4. $l=\lambda/2$ Where l is the length of dipole antenna.</p>	<p>6M</p>
<p>Ans :</p>	<p>(i) Advantages of folded dipole: 1. Higher input impedance 2. Greater bandwidth 3. Easy to construct 4. cost of construction is less</p> <p>(ii)</p> 	<p>any 2 advantages 2M</p> <p>1 M for each= 4 M</p>
<p>(b)</p>	<p>Explain Tropospheric scatter propagation with sketch.</p>	<p>6M</p>
<p>Ans :</p>	 <p>Tropospheric scatter propagation.</p> <p>As the name implies, troposcatter uses the troposphere as the region that affects the radio signals being transmitted, returning them to Earth so that they can be received by the distant receiver. Troposcatter relies on the fact that there are areas of slightly different dielectric</p>	<p>3M sketch</p> <p>3 M explanation</p>

constant in the atmosphere at an altitude of between 2 and 5 kilometers. Even dust in the atmosphere at these heights adds to the reflection of the signal. A transmitter launches a high power signal, most of which passes through the atmosphere into outer space. However a small amount is scattered when it passes through this area of the troposphere, and passes back to earth at a distant point. As might be expected, little of the signal is "scattered" back to Earth and as a result, path losses are very high. Additionally the angles through which signals can be reflected are normally small.

The area within which the scattering takes place is called the scatter volume, and its size is dependent upon the gain of the antennas used at either end. In view of the fact that scattering takes place over a large volume, the received signal will have travelled over a vast number of individual paths, each with a slightly different path length. As they all take a slightly different time to reach the receiver, this has the effect of "blurring" the overall received signal and this makes high speed data transmissions difficult.

- (c)
- i) Draw the practical AM diode detector circuit. Sketch its input and output waveforms.
 - (ii) Define the terms:
 1. Skip distance
 2. Maximum usable frequency
 3. Virtual height

6M

Ans
:

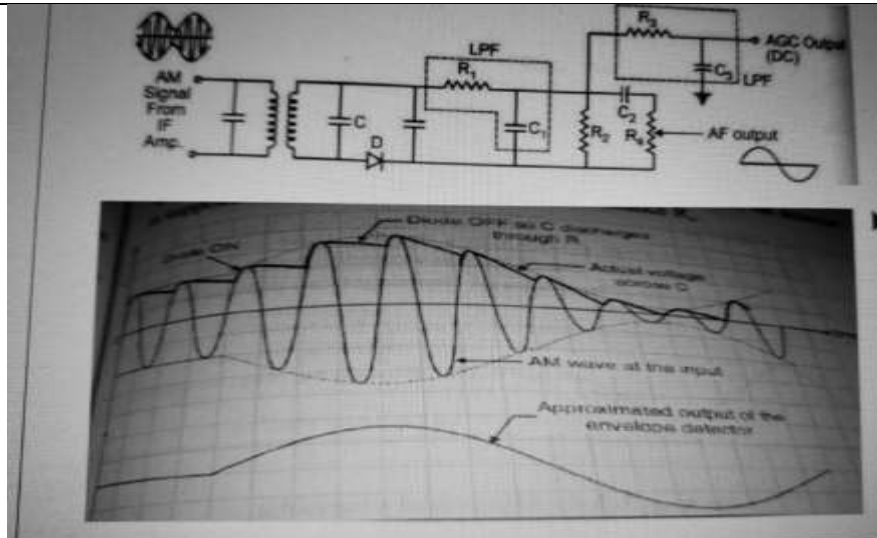


diagram
1.5 marks

wave forms
1.5marks

i) Practical AM diode detector

1. Skip distance:- Skip distance is defined as the shortest distance from a transmitter, measured along the surface of earth at which a sky wave of fixed frequency returns back to the earth.

2. Maximum usable frequency: The limiting frequency when the angle of incidence is other than the normal is known as maximum unstable frequency. $MUF = f_c \sec \theta$.

3. Virtual height:- The incident and refracted rays follow paths that are exactly the same as they have been if reflection had taken place from a surface located at a greater height, called Virtual height of this layer.

1 Mark for
each
definition